


# Coupling Accessories

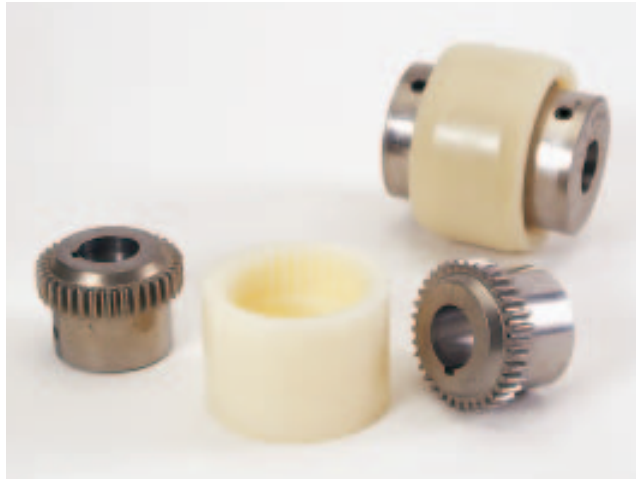

When selecting a coupling, note that HP values are for reference only under normal pump operation within rated specification. Please consult factory for critical performance or harsh duty applications.

## Coupling Selection

Coupling Series	Bore Ø (in)	Maximum HP @ Designated RPM		Part Number
		1750	1150	
<b>M-24</b>	0.625 x 0.625	4.0	2.6	A04-024-1201
	0.625 x 0.875			A04-024-1202
<b>M-28</b>	0.625 x 0.625	9.1	5.8	A04-028-1201
	0.625 x 0.875			A04-028-1202
	0.625 x 1.125			A04-028-1203
	0.875 x 0.875			A04-028-1204
	0.875 x 1.125			A04-028-1205
<b>M-38</b>	0.625 x 1.125	16.1	10.4	A04-038-1201
	0.875 x 1.125			A04-038-1202
	0.875 x 1.375			A04-038-1203
	1.125 x 1.125			A04-038-1204
	1.125 x 1.375			A04-038-1205
<b>M-42</b>	1.125 x 1.125	20.4	13.3	A04-042-1201
	1.125 x 1.375			A04-042-1202
	1.125 x 1.625			A04-042-1203
<b>M-48</b>	1.125 x 1.125	28.3	20.2	A04-048-1201
	1.125 x 1.375			A04-048-1202
	1.125 x 1.625			A04-048-1203
	1.125 x 1.875			A04-048-1204
<b>M-65</b>	1.125 x 2.125	84.5	50.0	A04-065-1201
	1.625 x 2.000			A04-065-1202
	1.875 x 2.000			A04-065-1203
	2.000 x 2.125			A04-065-1204
	1.375 x 2.000			A04-065-1205

## Pump and Motor Size Reference

Pump Model	Pump Shaft Ø (in)	Nominal Motor HP @ Designated Speed		Motor Frame Size	Motor Shaft Ø (in)
		1750	1150		
<b>F-21</b>	0.625				
<b>F-22</b>	0.625	1/4 to 1	1/4 to 1	56C	0.625
<b>D-03</b>	0.875	1-1/2	3/4	143T	0.875
<b>D-04</b>	0.875	2	1	145T	0.875
<b>D-10</b>	0.875	3	1-1/2	182T	1.125
<b>D-10-SD</b>	0.875	5	2	184T	1.125
<b>D-12</b>	0.875	7-1/2	3	213T	1.375
<b>D-15</b>	1.125	10	5	215T	1.375
<b>D-17</b>	1.125	15	7-1/2	254T	1.625
<b>H-25</b>	1.125	20	10	256T	1.625
<b>H-25-SD</b>	1.125	25	15	284T	1.875
<b>D-35</b>	2.000	30	20	286T	1.875
<b>D-35-SD</b>	2.000	–	25	324T	2.125
		–	30	326T	2.125