




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz      HN      A2      DIA      100 \*      WITHOUT INDUCER-◇  
 21B      CONNECTION      MOTOR FRAME NO.      126 ×      WITH INDUCER-△  
 S.G. 1.000      SUC. DIS.      A1, A2, A3      +      NPSHR  
 VIS. 1.00      50 X 40      ∇      (m)

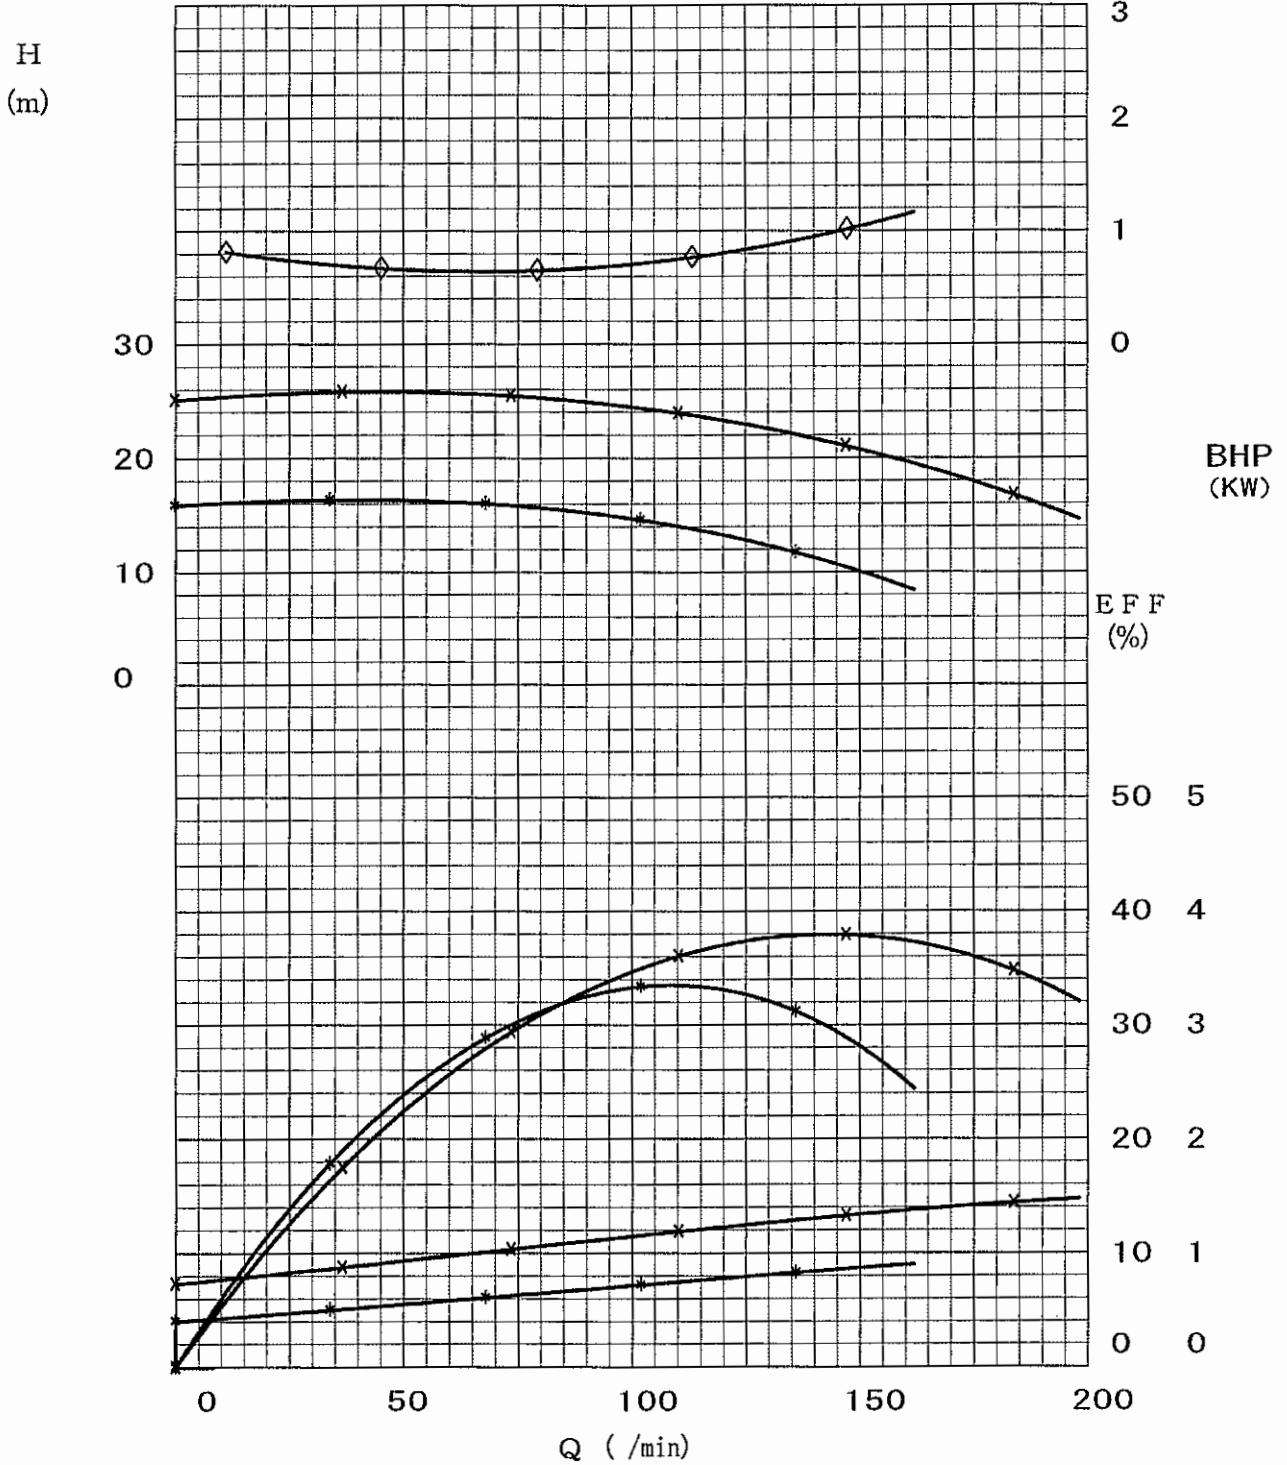

DESIGN CAPACITY

MIN. FLOW CAPACITY

		WITHOUT INDUCER		WITH INDUCER	
Q d =	105 /min	10 /min	- /min		
(	6.3 m <sup>3</sup> /h)	( 0.6 m <sup>3</sup> /h)	( - m <sup>3</sup> /h)		

TEST

Z= 1.050    Y= 1.000

客先提出不可

F# S032