



SGM SERIES

CHARACTERISTIC CURVES

| | |
|---------|--|
| No | |
| Issued | |
| Revised | |

50 Hz
22A

HN

A2

D I A

100 * WITHOUT INDUCER-◇


124 X WITH INDUCER-△

S.G. 1.000
VIS. 1.00

| CONNECTION | | MOTOR FRAME NO. |
|------------|------|-----------------|
| SUC. | DIS. | A1, A2, A3 |
| 50 X 40 | | |

+ NPSHR
▽ (m)

H (m)

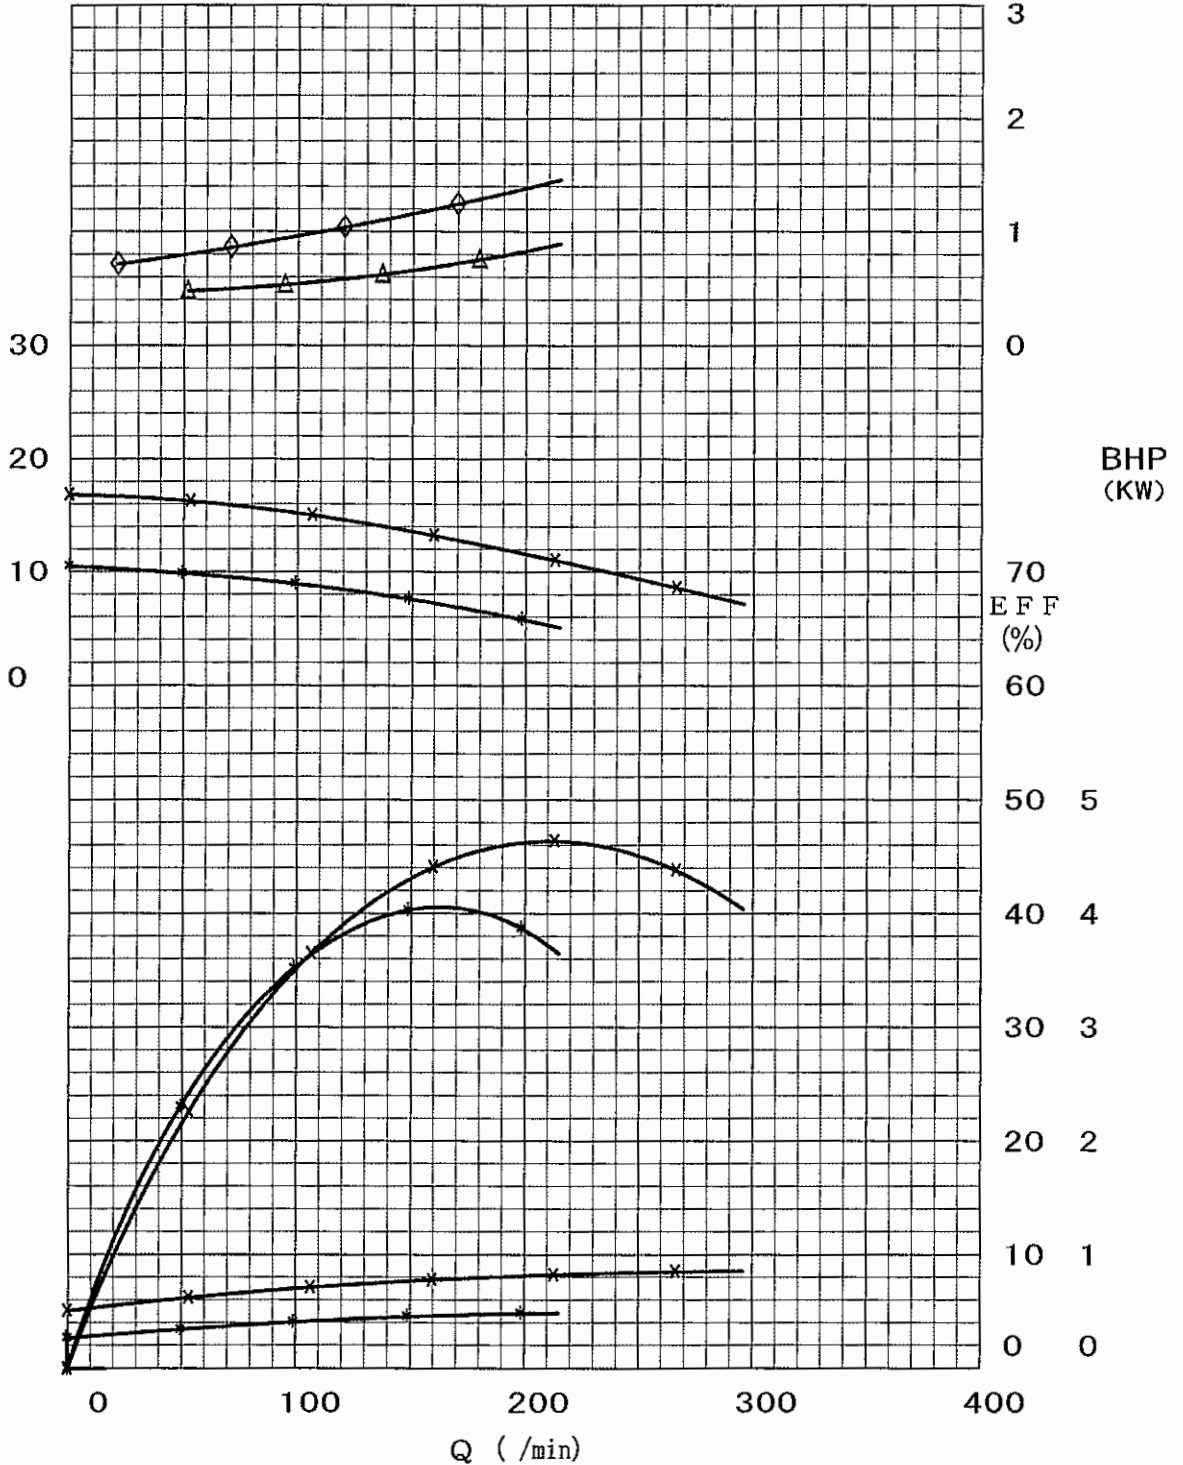

DESIGN CAPACITY

MIN. FLOW CAPACITY

Q d = 208 /min
(12.5 m³/h)

WITHOUT INDUCER
20 /min
(1.2 m³/h)

WITH INDUCER
50 /min
(3.0 m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032