




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN B1 DIA 124 * WITHOUT INDUCER-◇
 22C CONNECTION MOTOR FRAME NO. 154 × WITH INDUCER-△
 S.G. 1.000 SUC. DIS. A1, A2, A3 + NPSHR
 VIS. 1.00 50 X 40 B1, B2, B3 ∇ (m)

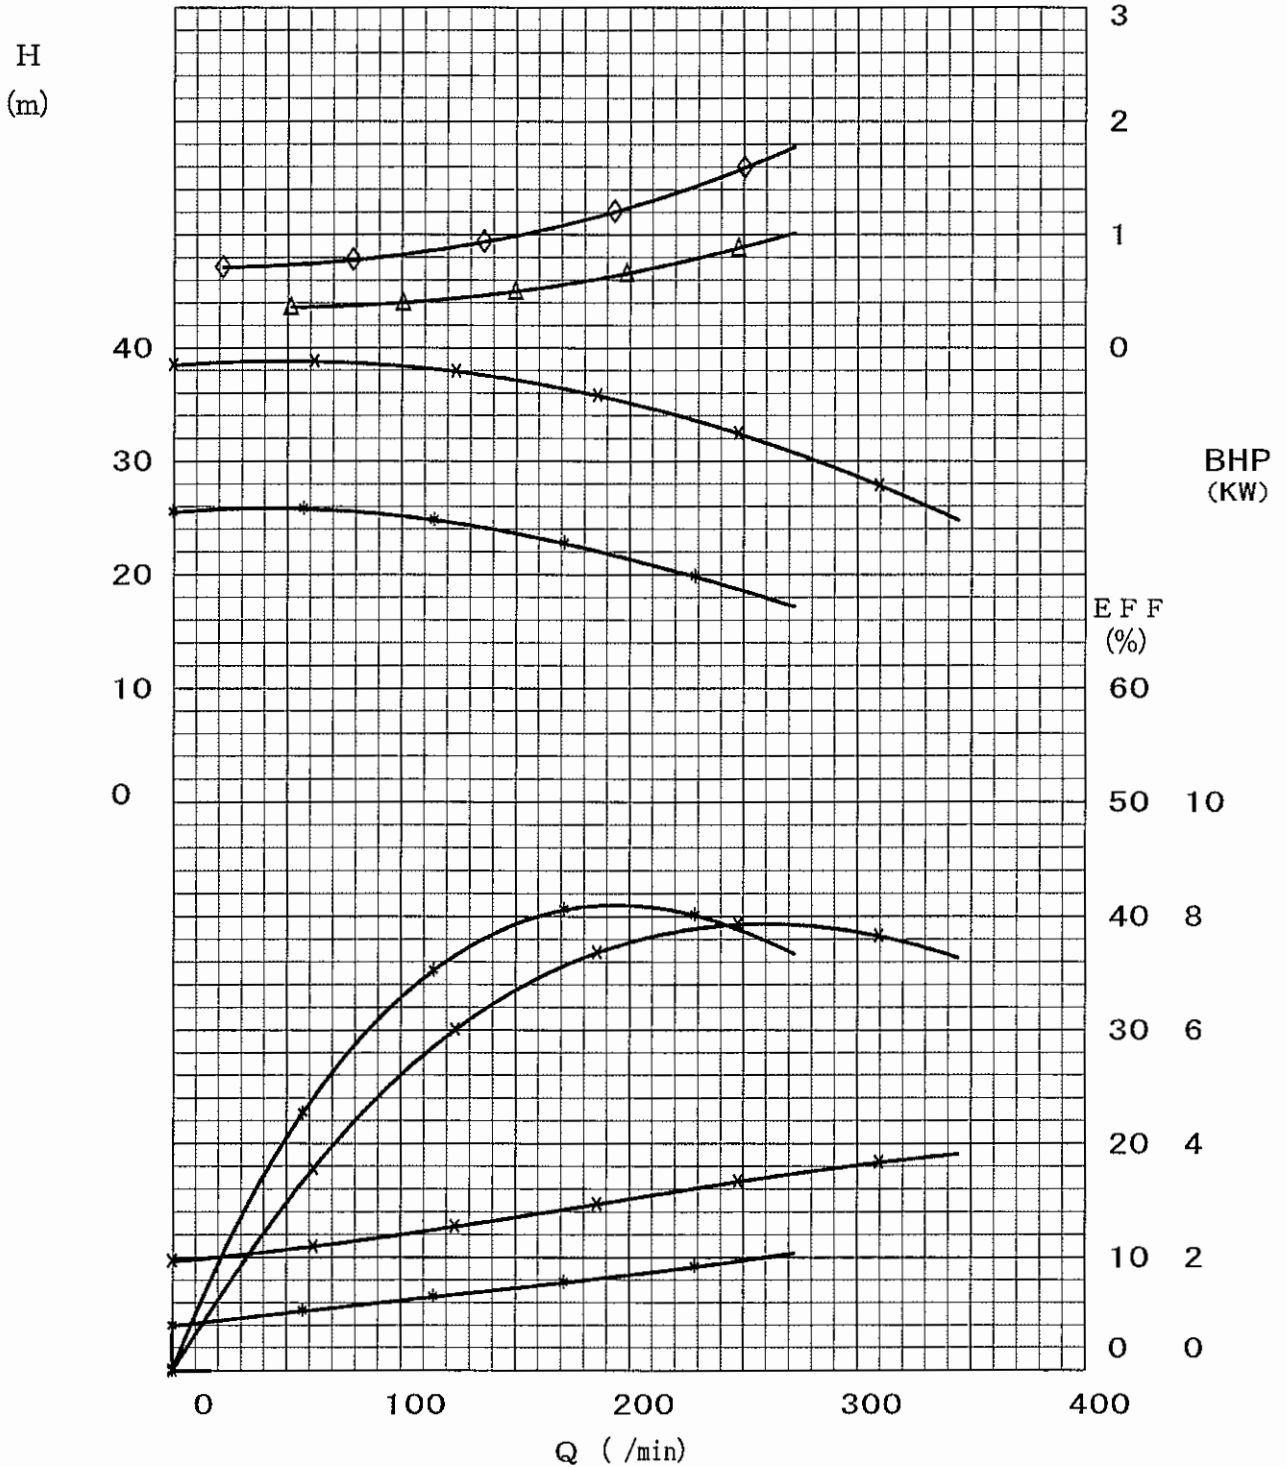

DESIGN CAPACITY

Q d = 208 /min
 (12.5 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
20	/min	50	/min
(1.2	m ³ /h)	(3.0	m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032