



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
22E

HN

B3

D I A

188 * WITHOUT INDUCER-◇


234 × WITH INDUCER-△

S. G. 1.000
VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	B1, B2, B3
50	40	C1, C2, C3, C4

+ NPSHR
▽ (m)

H (m)

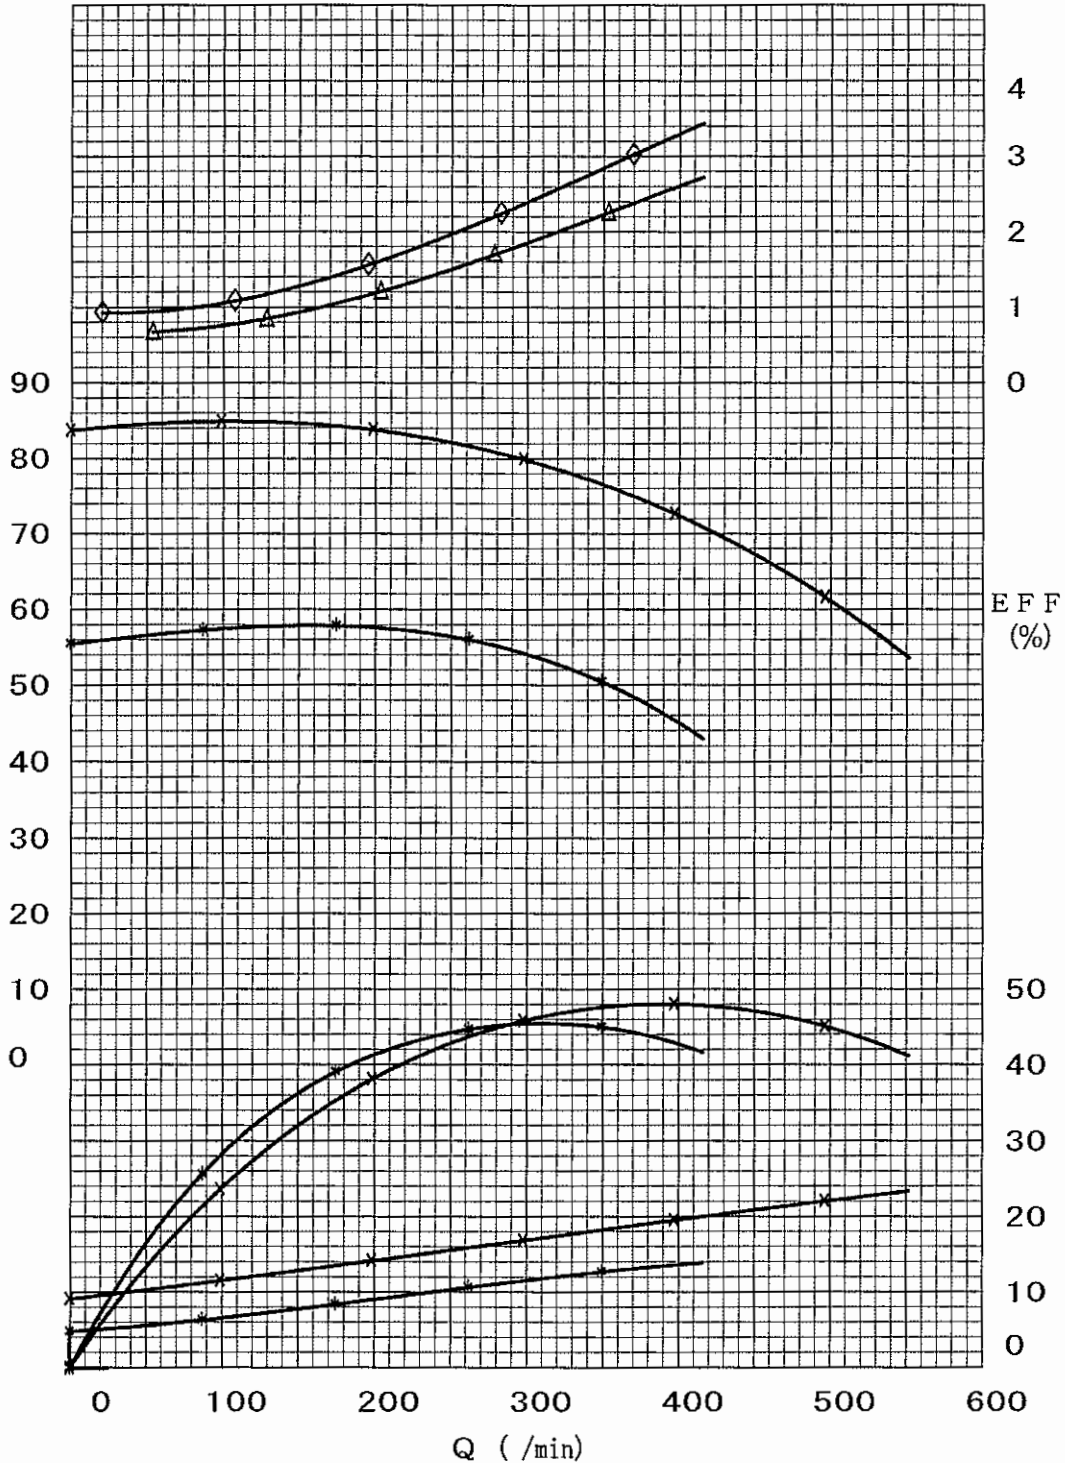

DESIGN CAPACITY

MIN. FLOW CAPACITY

Q d = 208 /min
(12.5 m³/h)

WITHOUT INDUCER
20 /min
(1.2 m³/h)

WITH INDUCER
50 /min
(3.0 m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033