




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz      HN      A2      D I A      100 \*    WITHOUT INDUCER-◇  
 23A      CONNECTION      MOTOR FRAME NO.      126 ×    WITH INDUCER-△  
          SUC.    DIS.      A1, A2, A3      +      NPSHR  
          VIS.    1.00      65 X 50      ∇      (m)

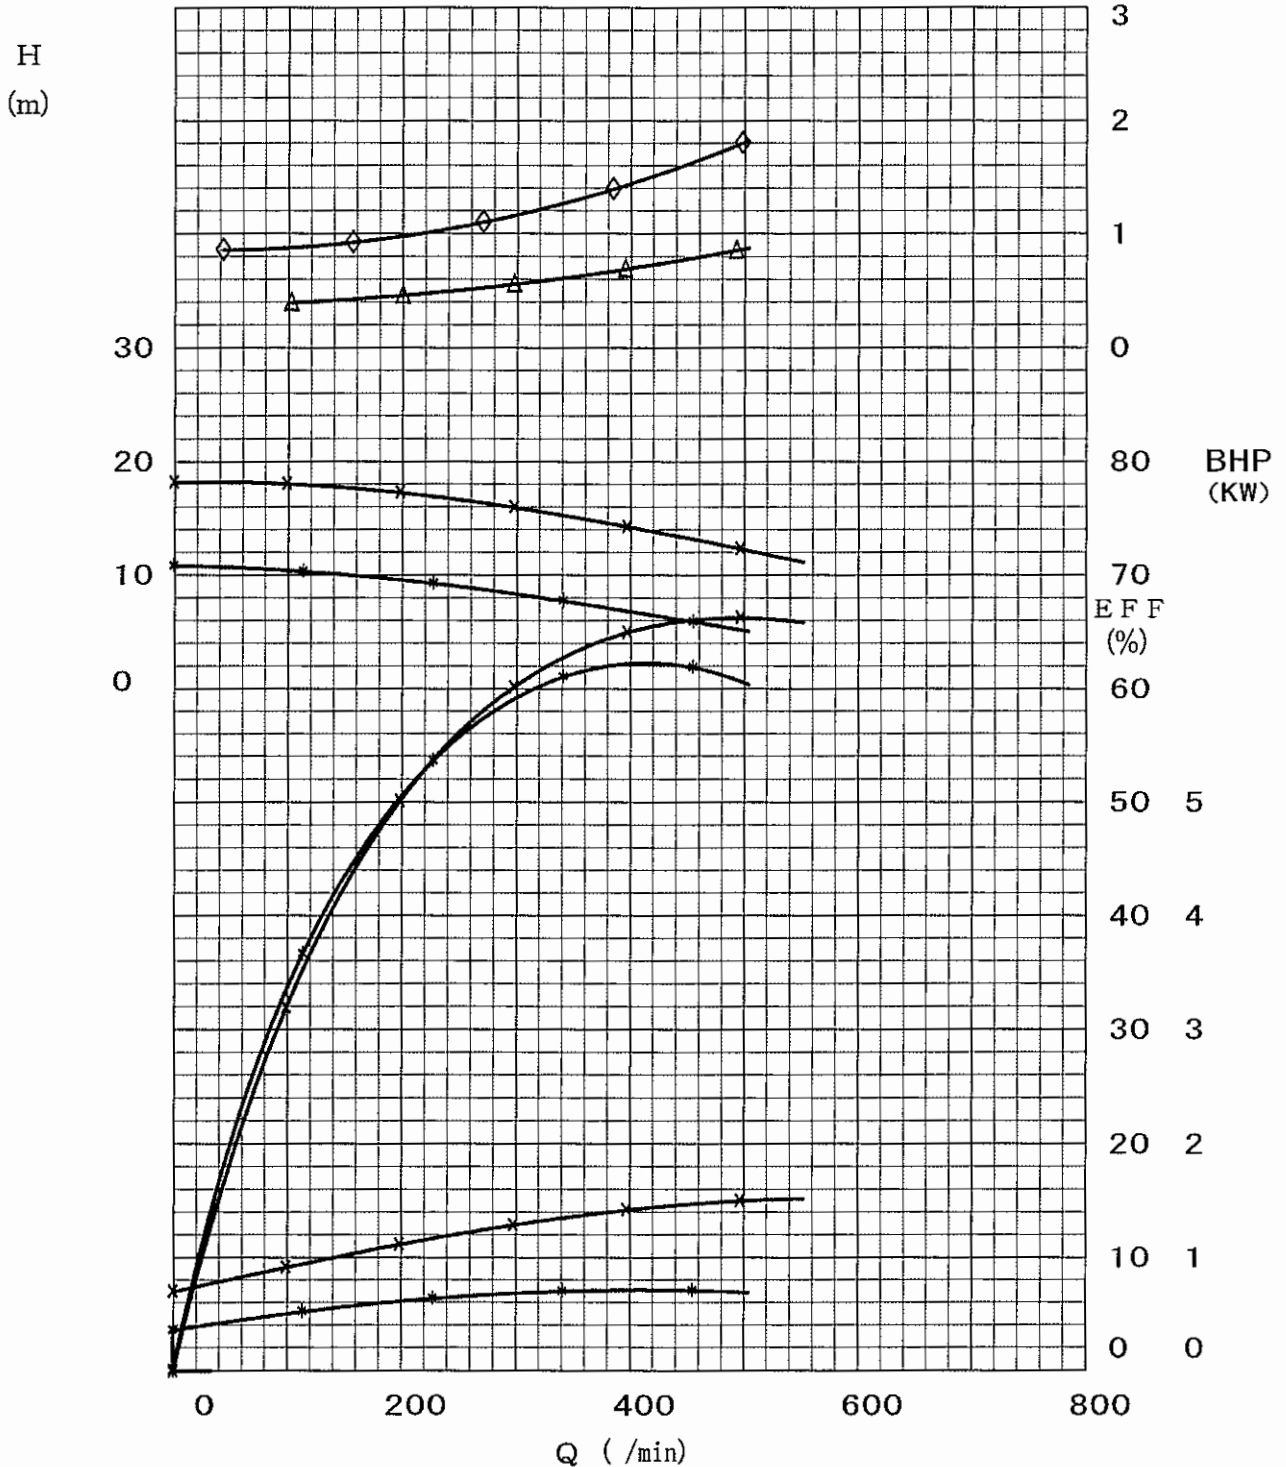

DESIGN CAPACITY

Q d =      417      /min  
 (      25      m<sup>3</sup>/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
40	/min	100	/min
( 2.4	m <sup>3</sup> /h)	( 6.0	m <sup>3</sup> /h)

TEST

Z= 1.050    Y= 1.000

客先提出不可

FN S032