



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz  
23C

HN

B2

D I A

148 \* WITHOUT INDUCER-◇


186 X WITH INDUCER-△

S. G. 1.000  
VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	A1, A2, A3
65	50	B1, B2, B3

+ NPSHR  
▽ (m)

H (m)

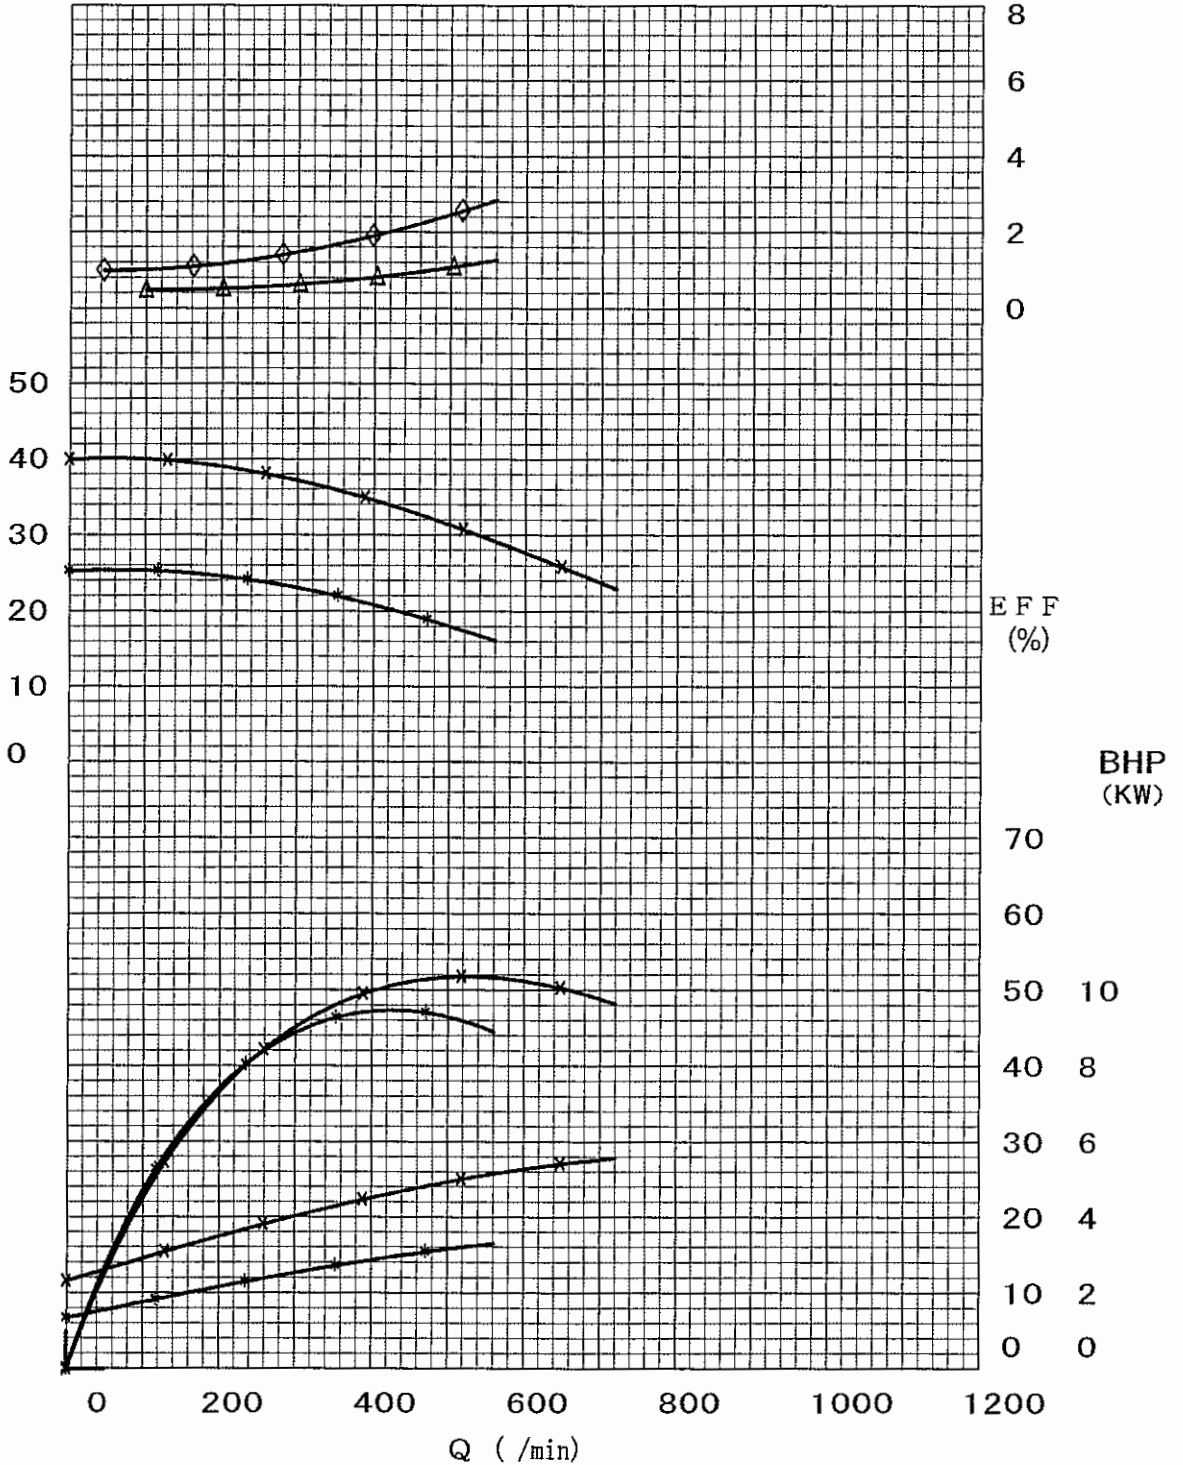

DESIGN CAPACITY

MIN. FLOW CAPACITY

Q d = 417 /min  
( 25 m<sup>3</sup>/h)

WITHOUT INDUCER  
40 /min  
( 2.4 m<sup>3</sup>/h)

WITH INDUCER  
100 /min  
( 6.0 m<sup>3</sup>/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033