




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN C2 DIA 176 * WITHOUT INDUCER-◇
 23D CONNECTION MOTOR FRAME NO. 220 × WITH INDUCER-△
 S.G. 1.000 SUC. DIS. B1, B2, B3 + NPSHR
 VIS. 1.00 65 X 40 C1, C2, C3, C4 ∇ (m)

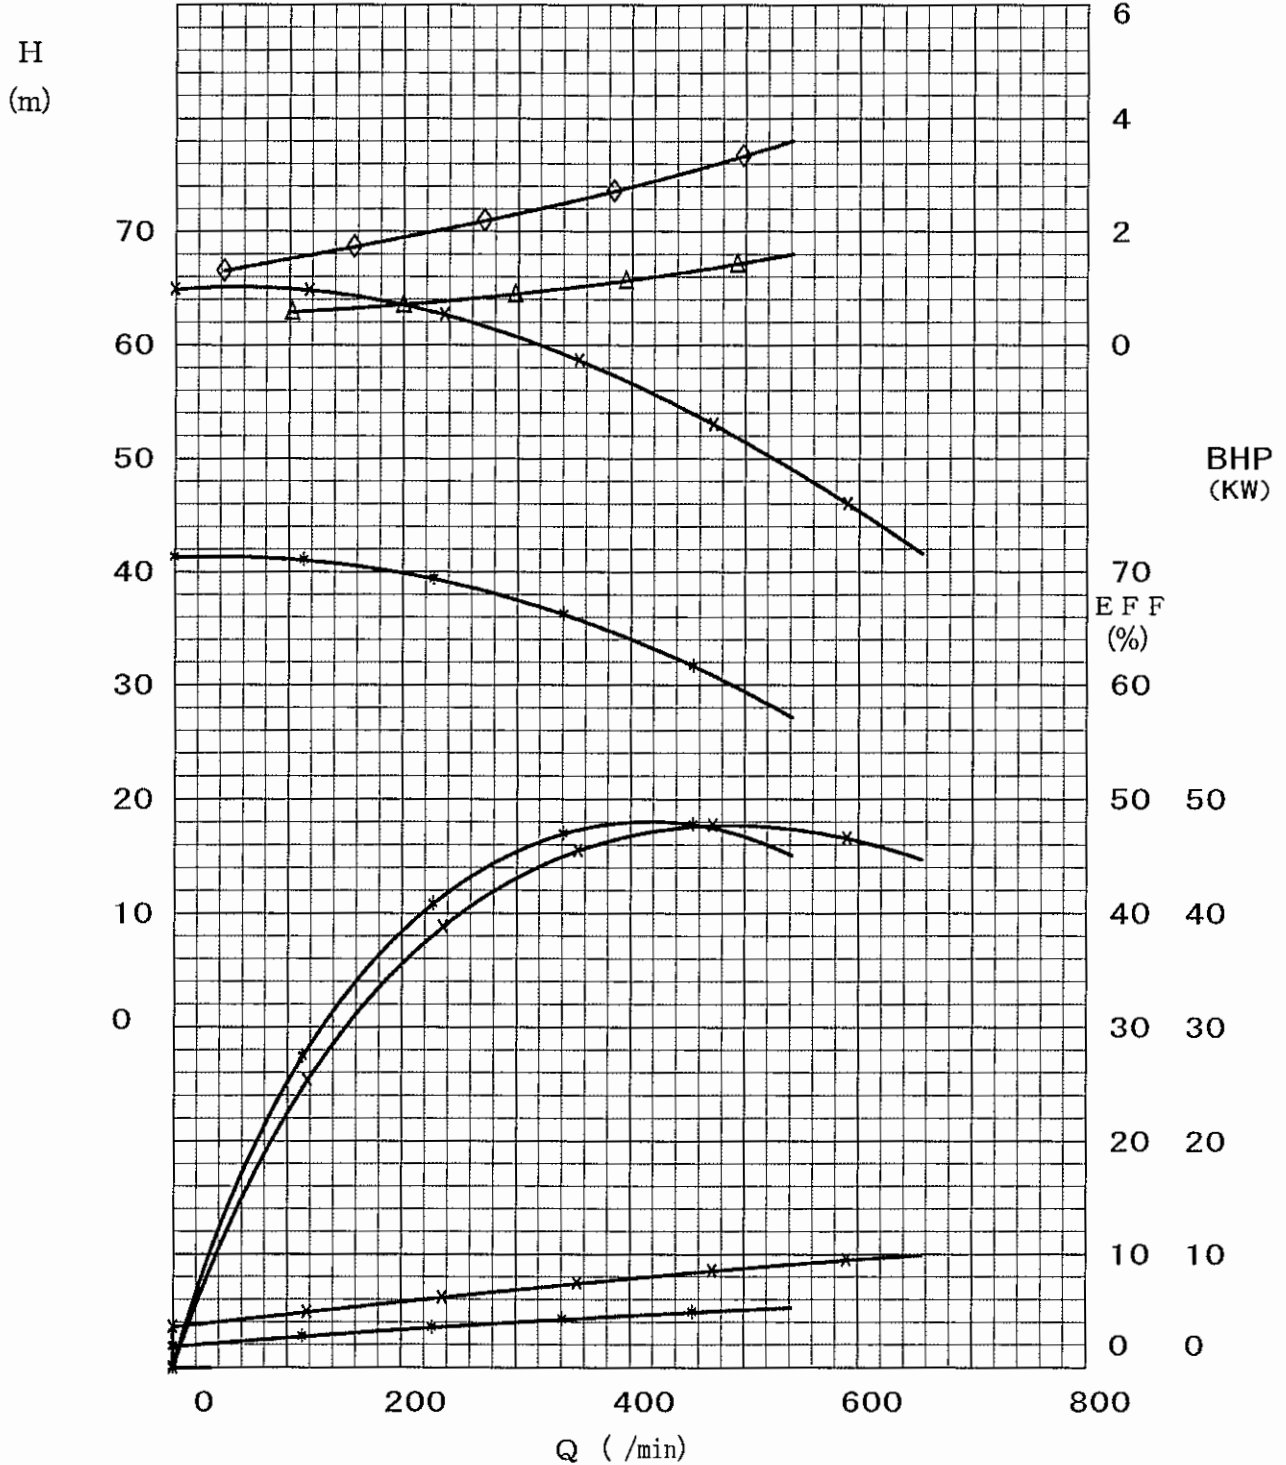

DESIGN CAPACITY

Q d = 417 /min
 (25 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
40	/min	100	/min
(2.4	m ³ /h)	(6.0	m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032