



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
24A

HN

A3

DIA


102 * WITHOUT INDUCER-◇

128 × WITH INDUCER-△

S.G. 1.000
VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	A1, A2, A3
80	65	B1, B2, B3

+ NPSHR
▽ (m)

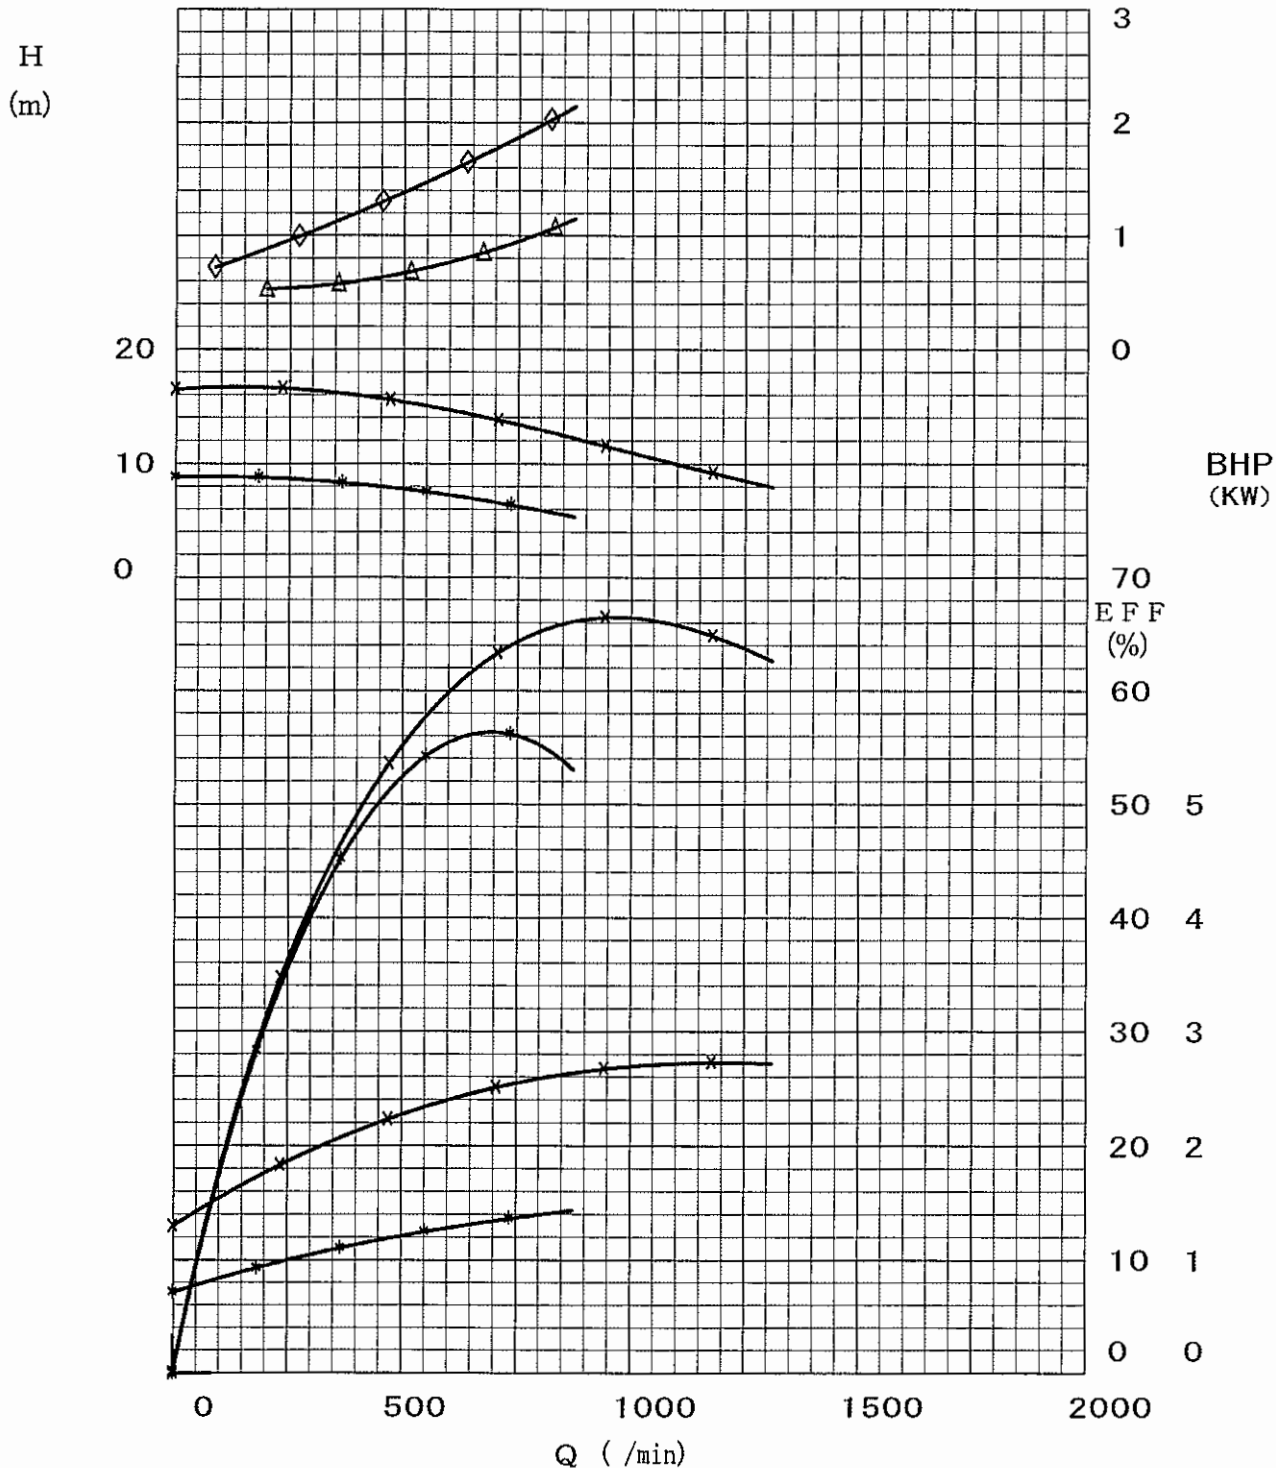

DESIGN CAPACITY

Q d = 833 /min
(50 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER	WITH INDUCER
80 /min	200 /min
(4.8 m ³ /h)	(12.0 m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032