



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz  
24B

HN

B1

DIA

124 \* WITHOUT INDUCER-◇

154 × WITH INDUCER-△


S.G. 1.000

VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	A1, A2, A3
80 X	65	B1, B2, B3

+ NPSHR  
▽ (m)

H  
(m)

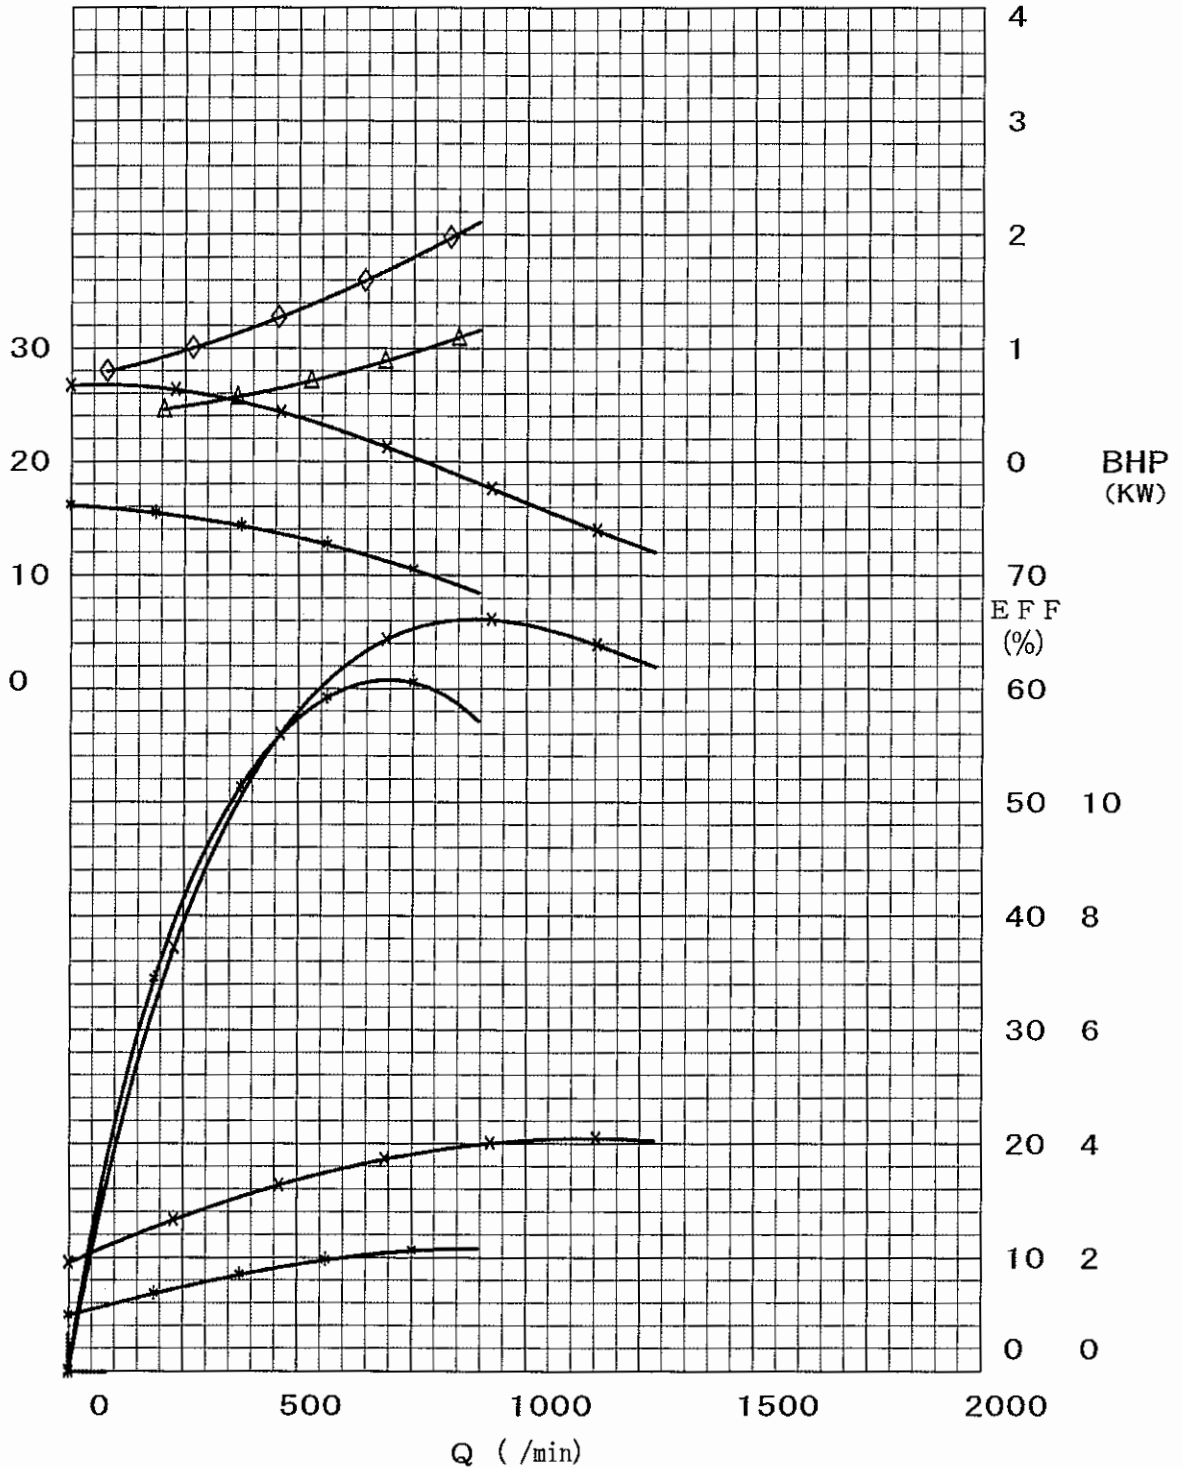

DESIGN CAPACITY

Q d = 833 /min  
( 50 m<sup>3</sup>/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER	WITH INDUCER
80 /min	200 /min
( 4.8 m <sup>3</sup> /h)	( 12.0 m <sup>3</sup> /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032