




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN G2 D I A 180 * WITHOUT INDUCER-◇
 24D CONNECTION MOTOR FRAME NO. 224 × WITH INDUCER-△
 S.G. 1.000 SUC. DIS. B1, B2, B3 + NPSHR
 VIS. 1.00 80 X 50 C1, C2, C3, C4 ∇ (m)

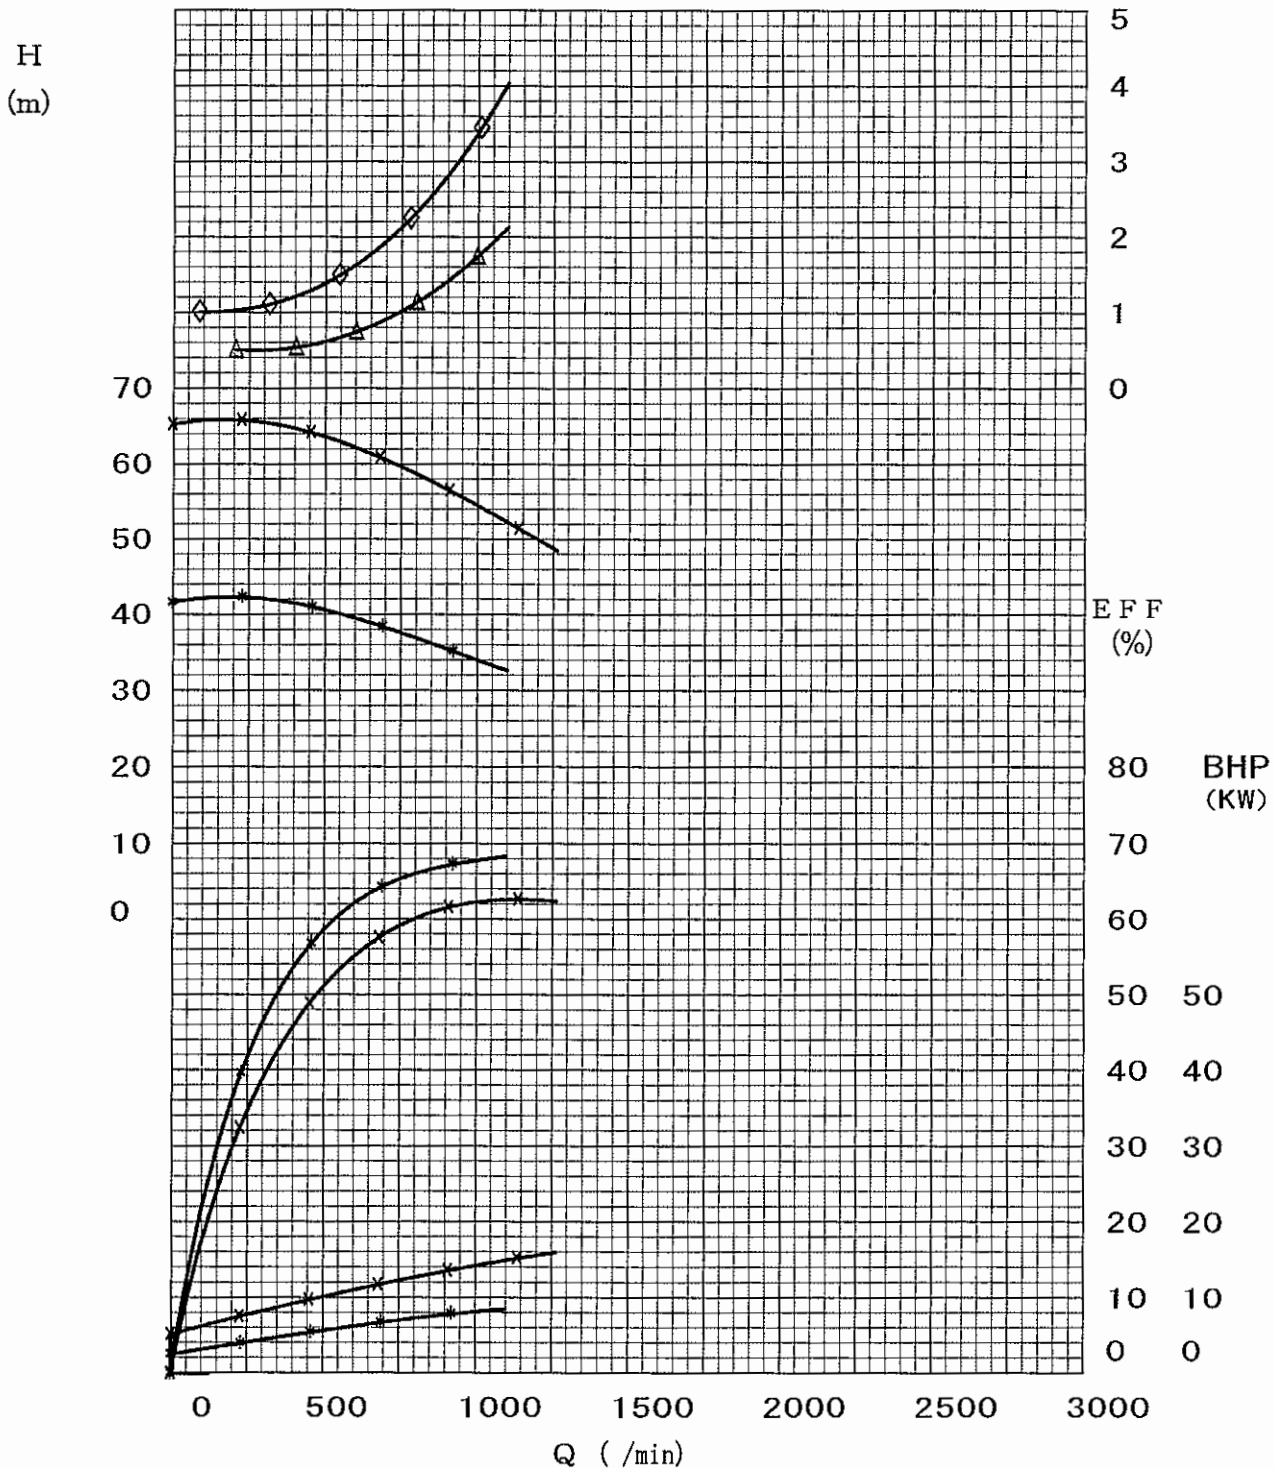

DESIGN CAPACITY

Q d = 833 /min
 (50 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
80	/min	200	/min
(4.8	m ³ /h)	(12.0	m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033