




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz      HN      D2      D I A      222 \*      WITHOUT INDUCER-◇  
 24E      CONNECTION      MOTOR FRAME NO.      278 x      WITH INDUCER-△  
          SUC.      DIS.      C1, C2, C3, C4      +      NPSHR  
          VIS.      1.000      D1, D2      ∇      (m)

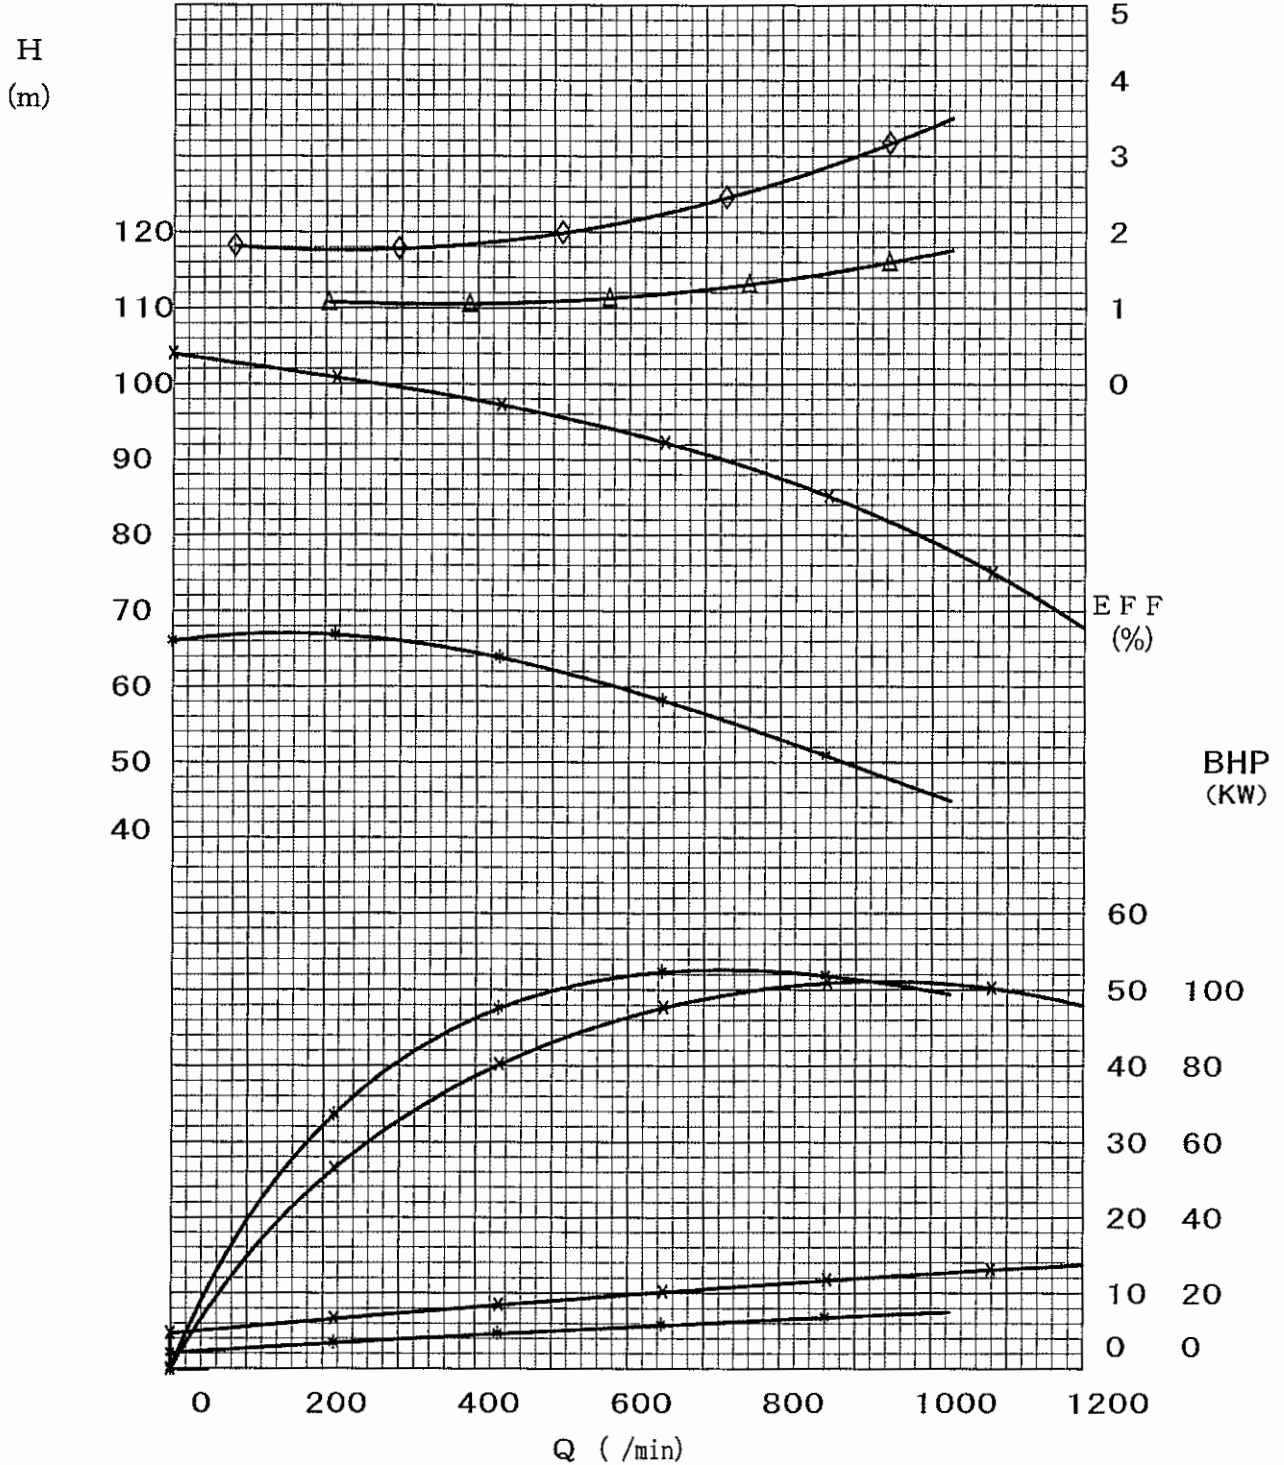

DESIGN CAPACITY

Q d =      833      /min  
          (      50      m<sup>3</sup>/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
80	/min	200	/min
( 4.8	m <sup>3</sup> /h)	( 12.0	m <sup>3</sup> /h)

TEST

Z= 1.050      Y= 1.000

客先提出不可

F# S033