




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN B2 DIA 128 * WITHOUT INDUCER-◇
 25B CONNECTION MOTOR FRAME NO. 160 × WITH INDUCER-△
 S.G. 1.000 SUC. DIS. B1, B2, B3 + NPSHR
 VIS. 1.00 100 X 80 C1, C2, C3, C4 ∇ (m)

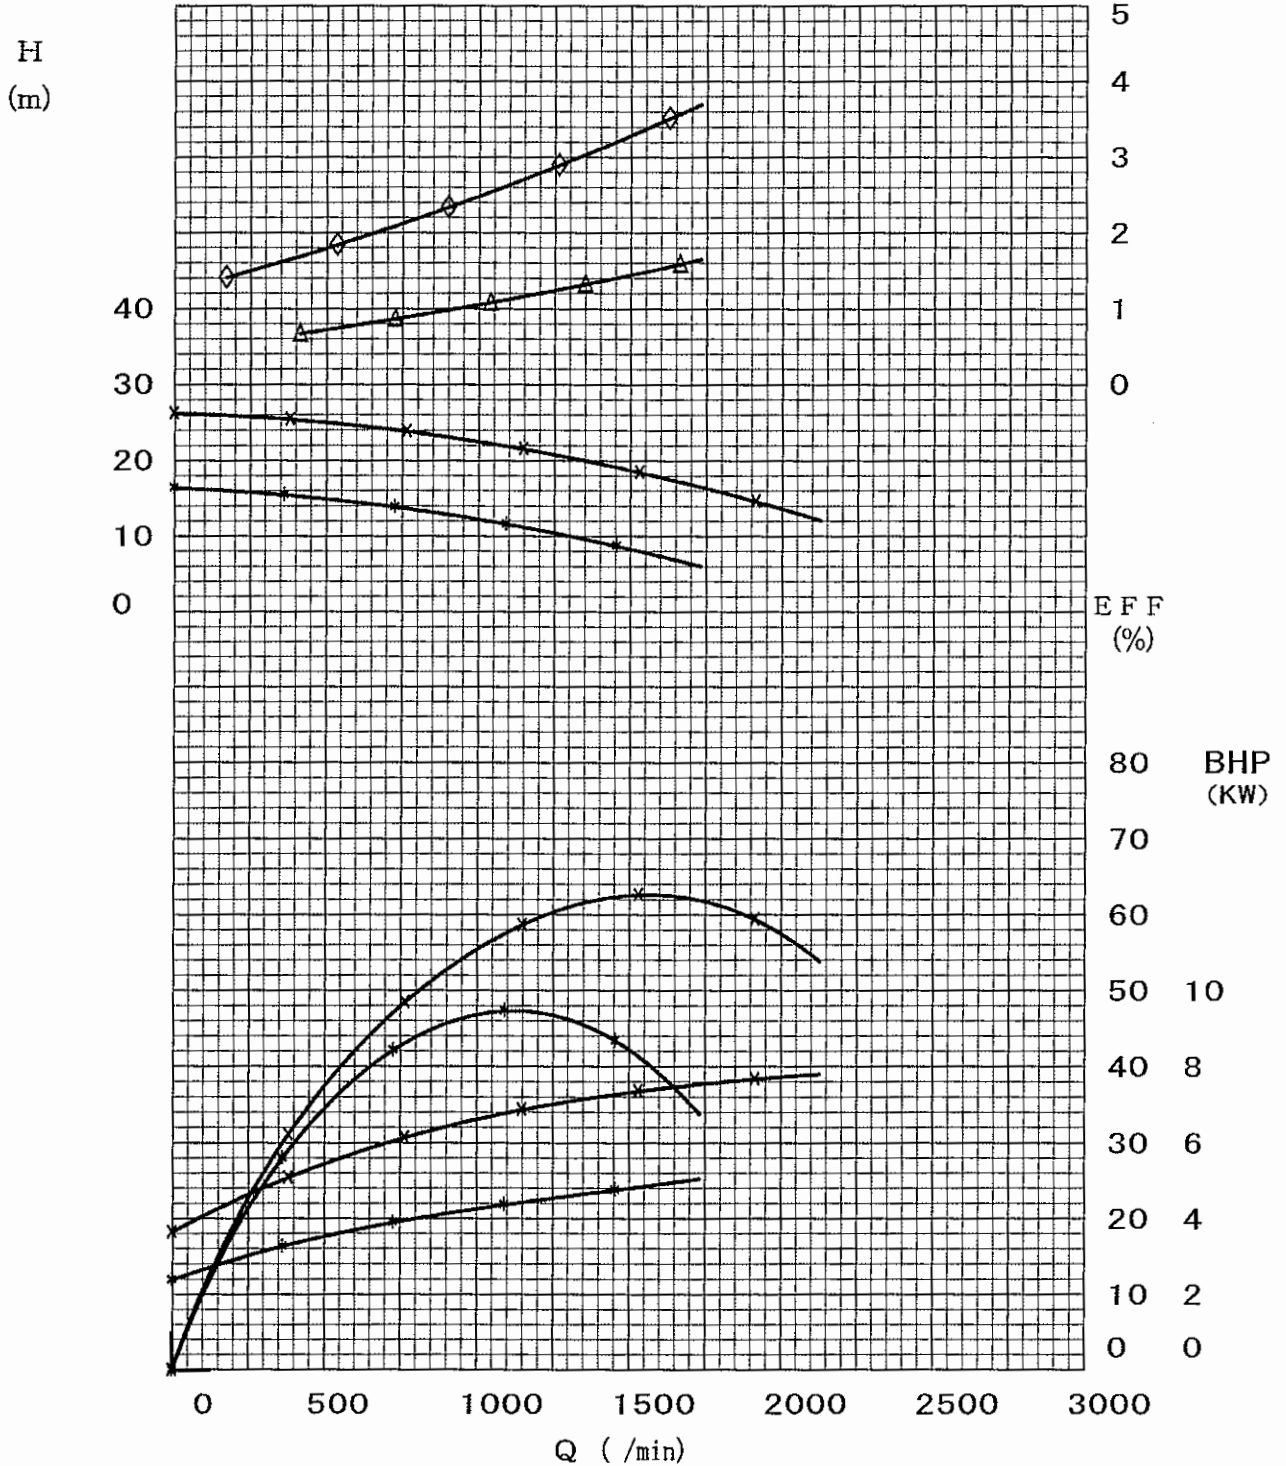

DESIGN CAPACITY

Q d = 1667 /min
 (100 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
160	/min	400	/min
(9.6	m³/h)	(24	m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033