



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
25C

HN

G4

D I A

152 * WITHOUT INDUCER-◇

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	C1, C2, C3, C4
100	X 80	D1, D2

190 x WITH INDUCER-△

S.G. 1.000


+

NPSHR

VIS. 1.00

▽

(m)

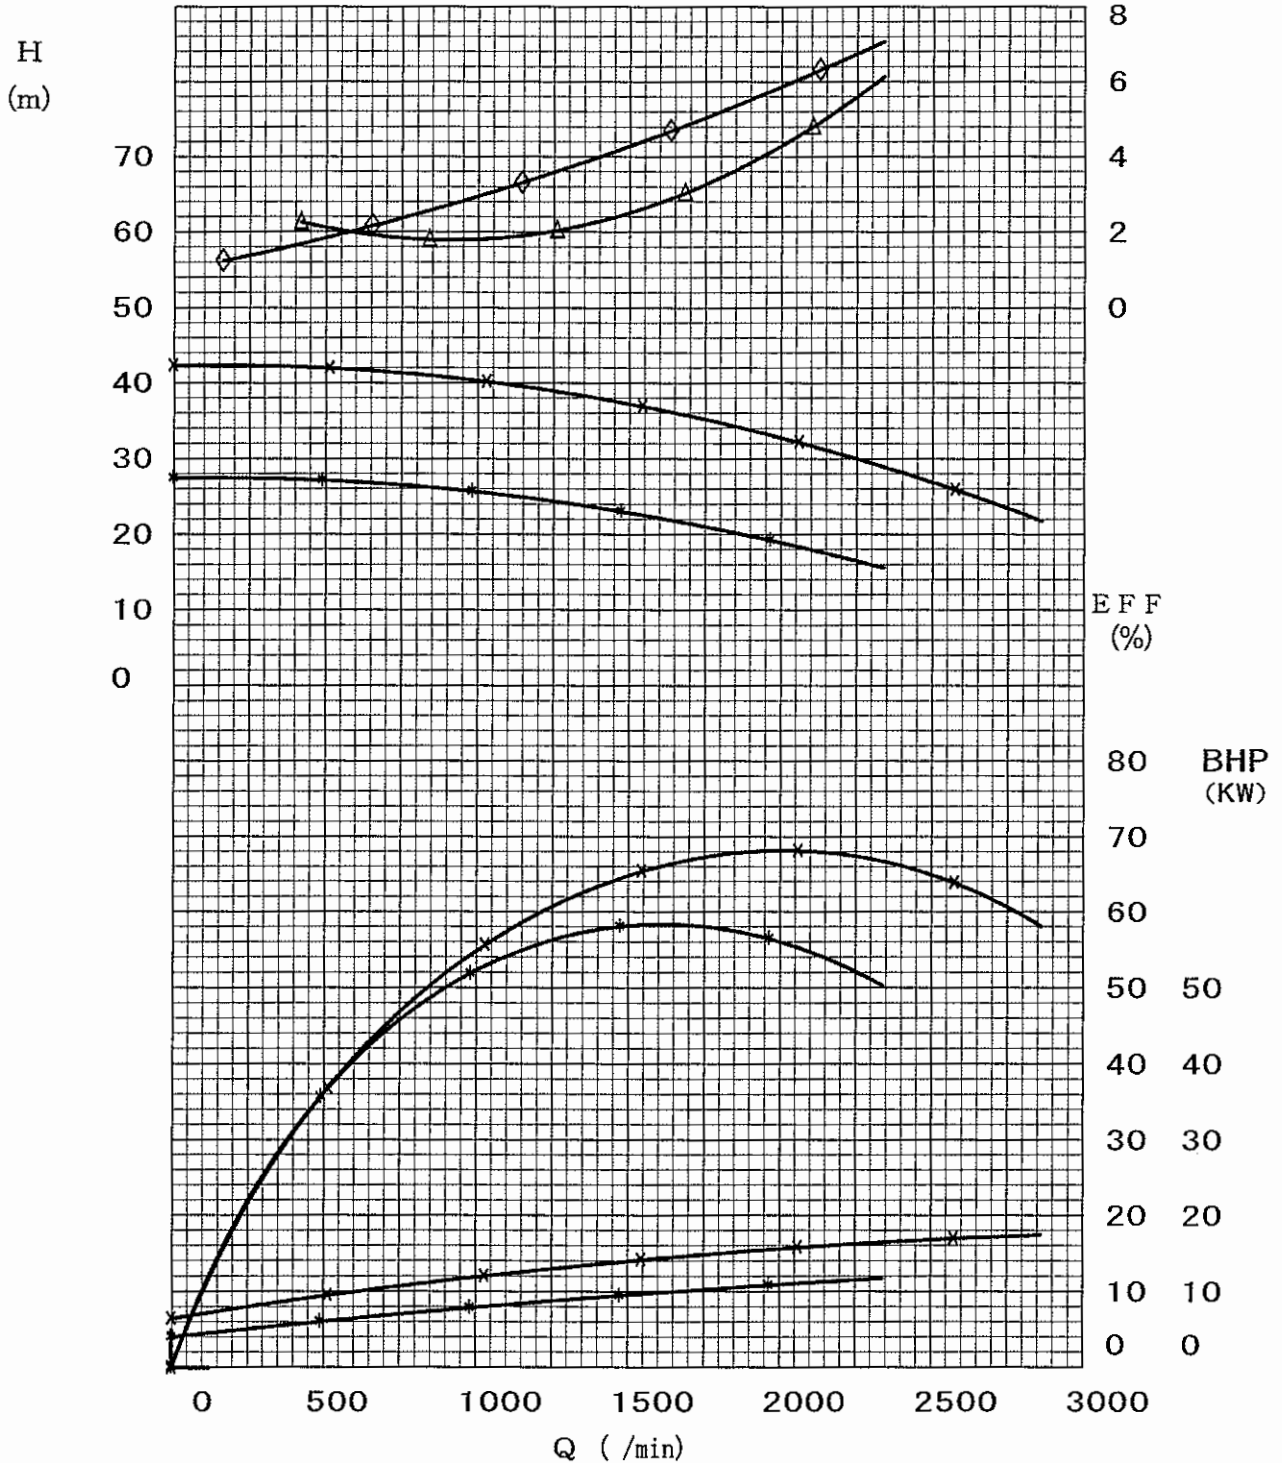

DESIGN CAPACITY

MIN. FLOW CAPACITY

Q d = 1667 /min
(100 m³/h)

WITHOUT INDUCER
160 /min
(9.6 m³/h)

WITH INDUCER
400 /min
(24 m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# 5033