




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN D1 D I A 187 * WITHOUT INDUCER-◇
 25D CONNECTION MOTOR FRAME NO. 234 × WITH INDUCER-△
 S. G. 1.000 SUC. DIS. C1, C2, C3, G4 + NPSHR
 VIS. 1.00 100 X 65 D1, D2 ∇ (m)

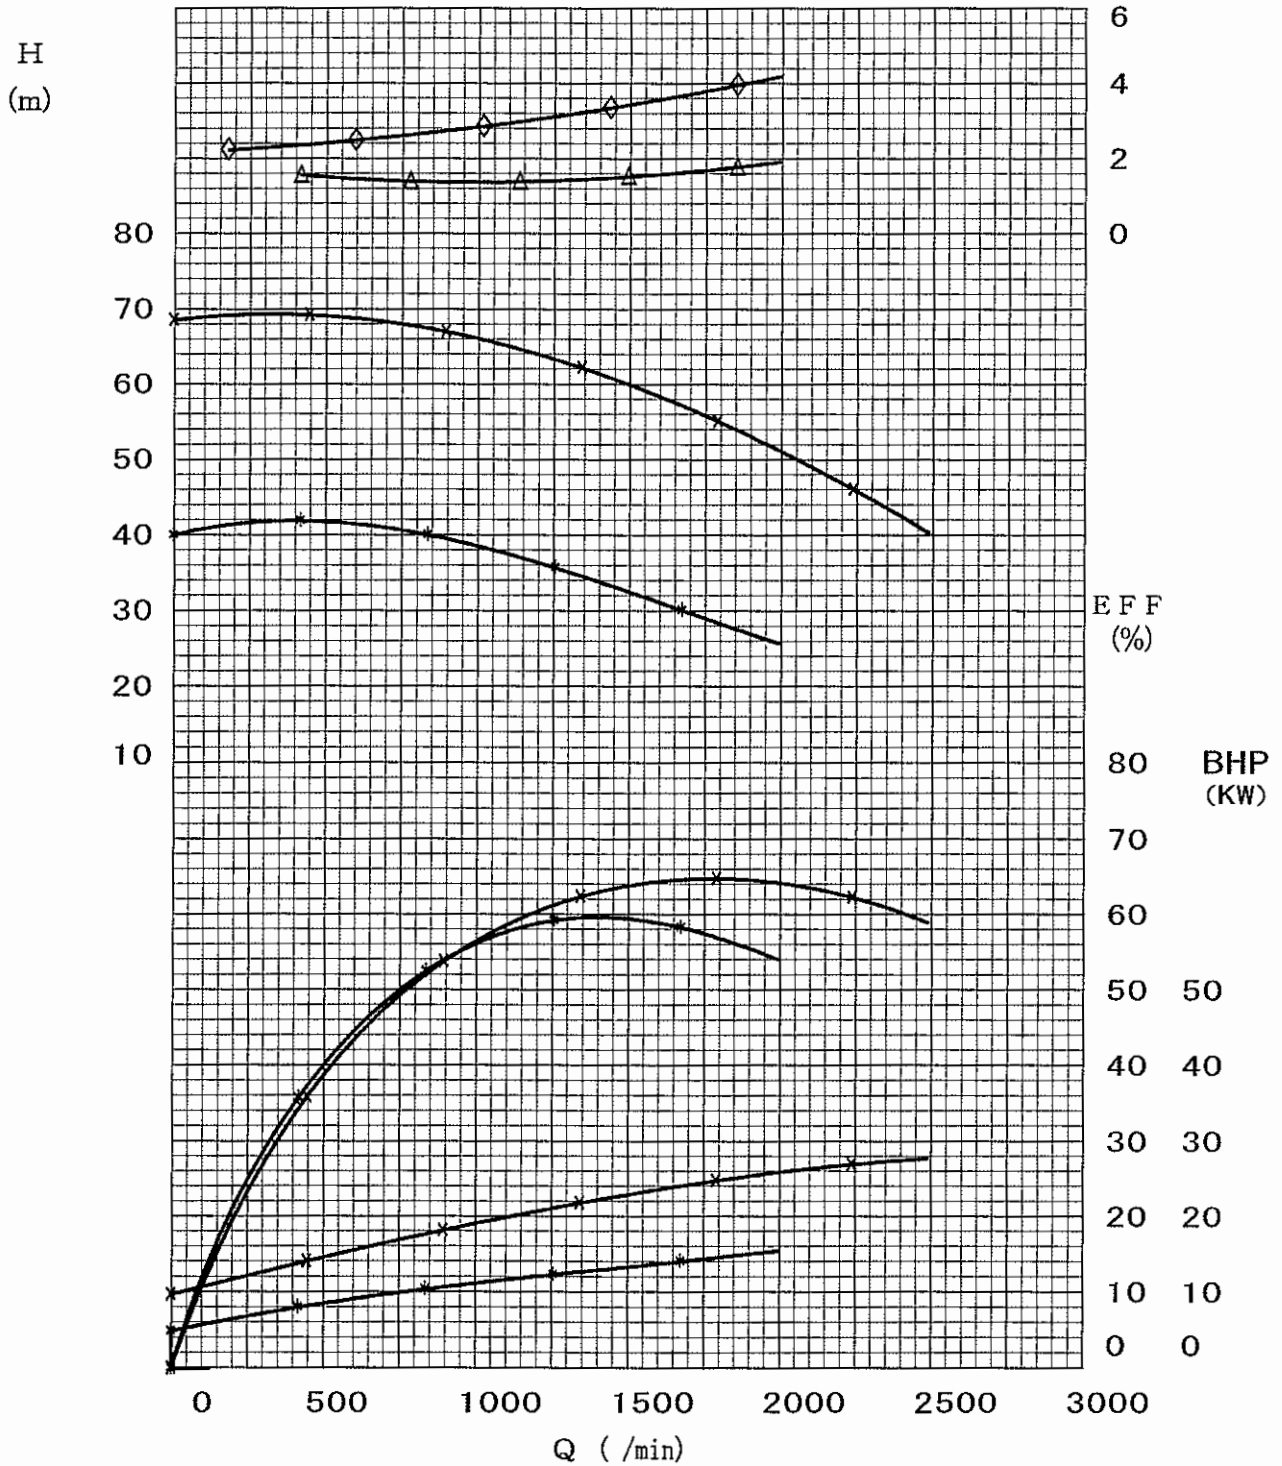

DESIGN CAPACITY

Q d = 1667 /min
 (100 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
160	/min	400	/min
(9.6	m ³ /h)	(24	m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033