



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
25E

HN

D2

D I A


233 * WITHOUT INDUCER-◇

292 x WITH INDUCER-△

S.G. 1.000
VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	C1, C2, C3, C4
100	X 65	D1, D2

+ NPSHR
▽ (m)

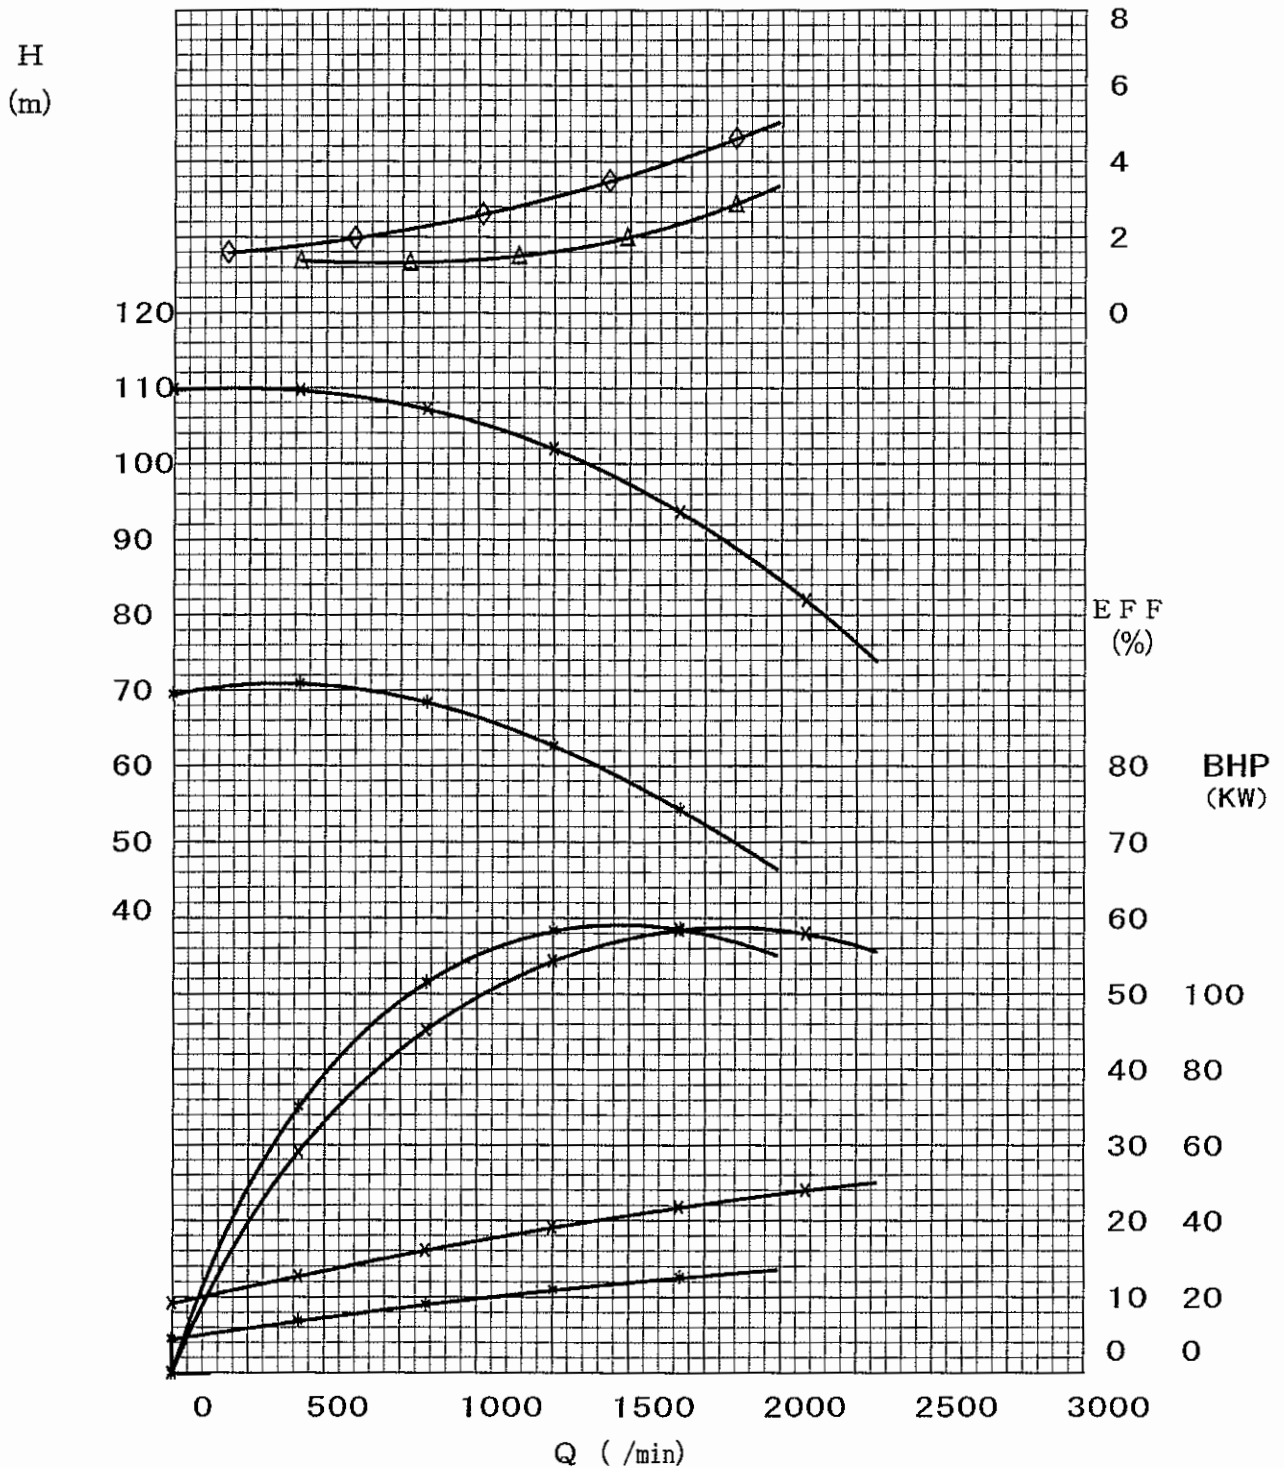

DESIGN CAPACITY

Q d = 1667 /min
(100 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
160 /min	(9.6 m ³ /h)	400 /min	(24 m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033