




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz      HN      F4      DIA      174 \*      WITHOUT INDUCER-◇  
 26D      CONNECTION      MOTOR FRAME NO.      218 ×      WITH INDUCER-△  
 S. G. 1.000      SUC. DIS.      D1, D2      +      NPSHR  
 VIS. 1.00      125 X 100      F1, F2, F3, F4      ∇      (m)

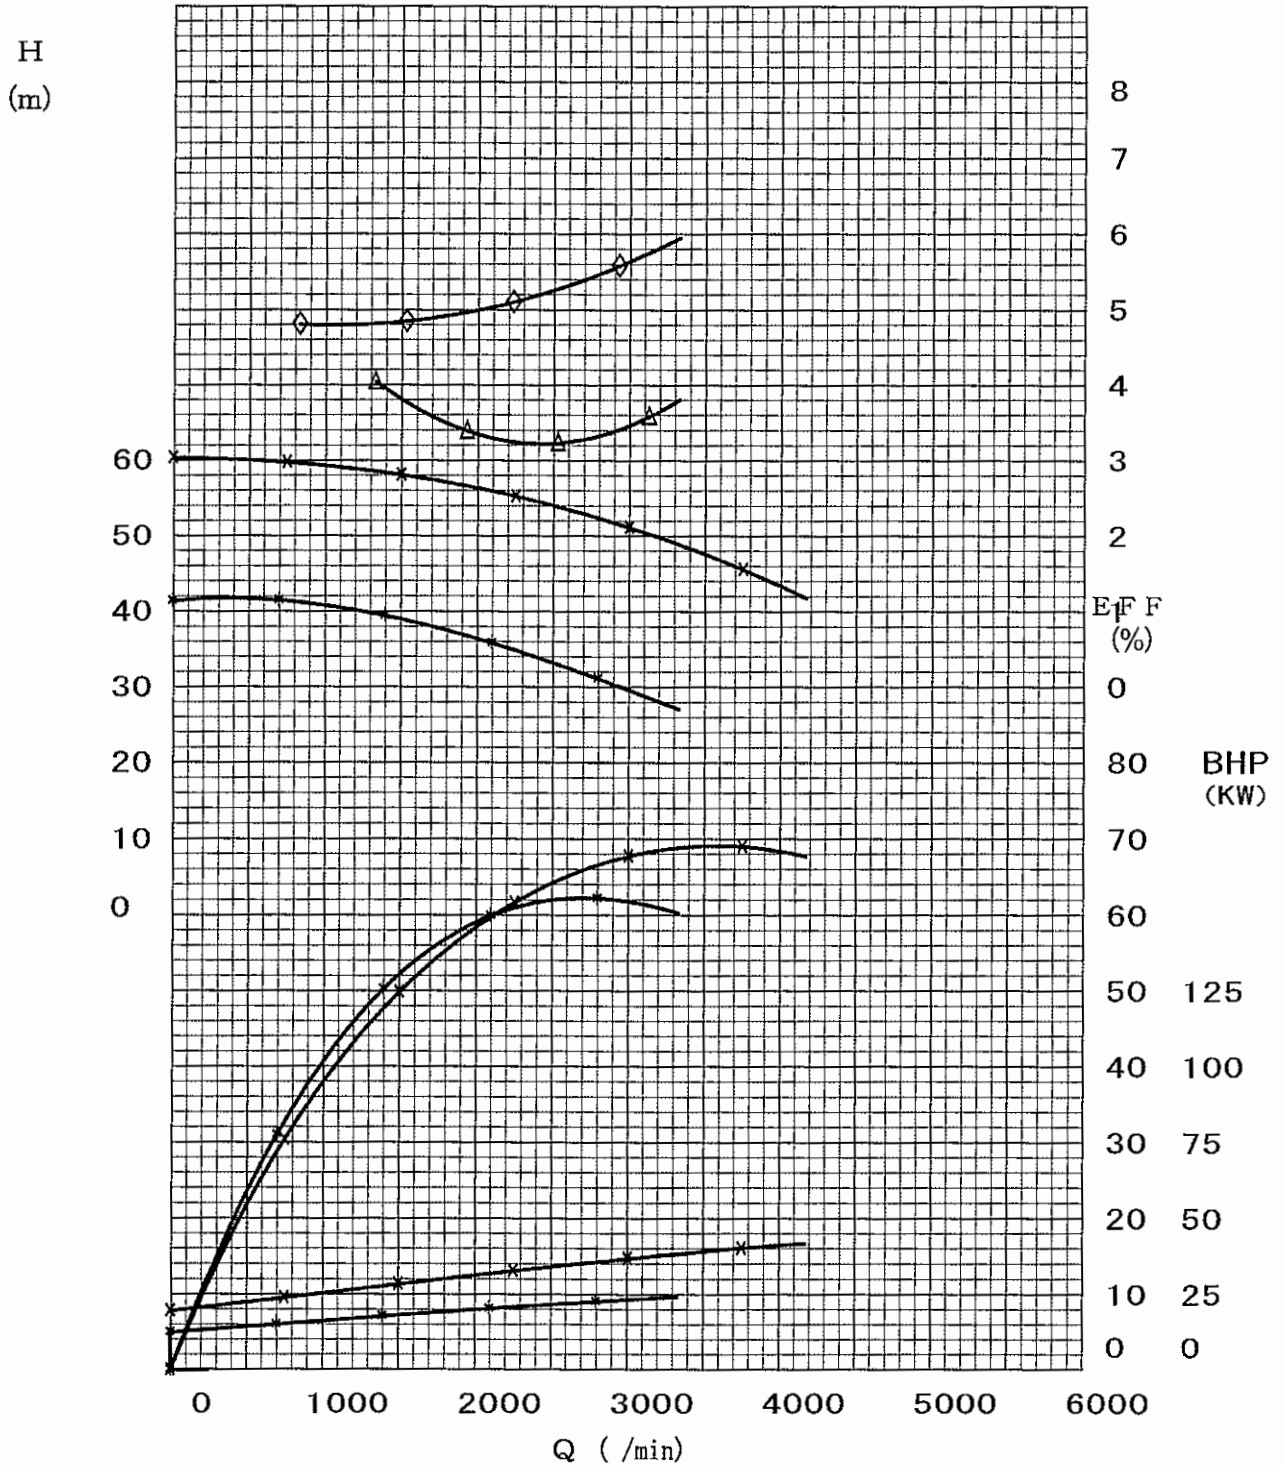

DESIGN CAPACITY

Q d = 3333 /min  
 ( 200 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
833 /min	( 50 m³/h)	1333 /min	( 80 m³/h)

TEST

Z= 1.050      Y= 1.000

客先提出不可

F# S033