




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN F4 DIA 220 * WITHOUT INDUCER-◇
 26E CONNECTION MOTOR FRAME NO. 266 × WITH INDUCER-△
 S.G. 1.000 SUC. DIS. F1, F2, F3, F4 + NPSHR
 VIS. 1.00 125 X 100 ∇ (m)

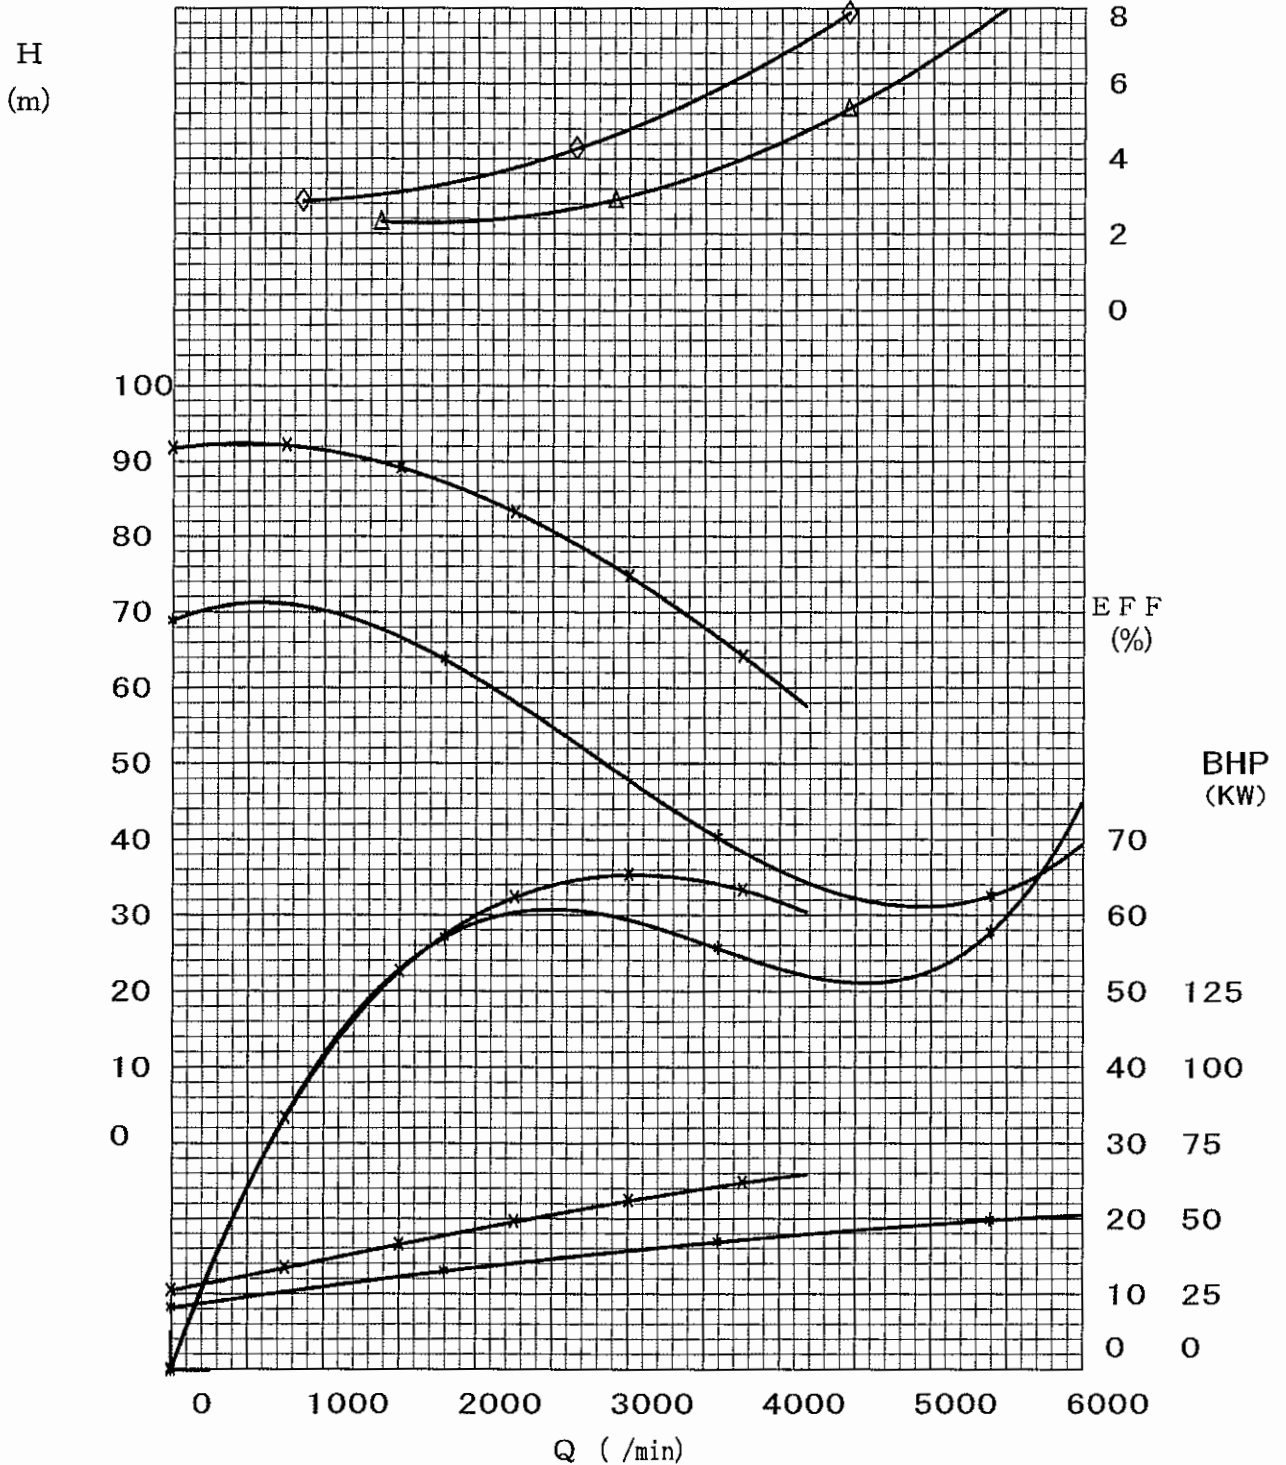

DESIGN CAPACITY

Q d = 3333 /min
 (200 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
833 /min	(50 m ³ /h)	1333 /min	(80 m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033