



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
47B

HN

J4

DIA

240 * WITHOUT INDUCER-◇


300 X WITH INDUCER-△

S.G. 1.000
VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	J1, J2, J3, J4
200 X 150		

+ NPSHR
▽ (m)

H (m)

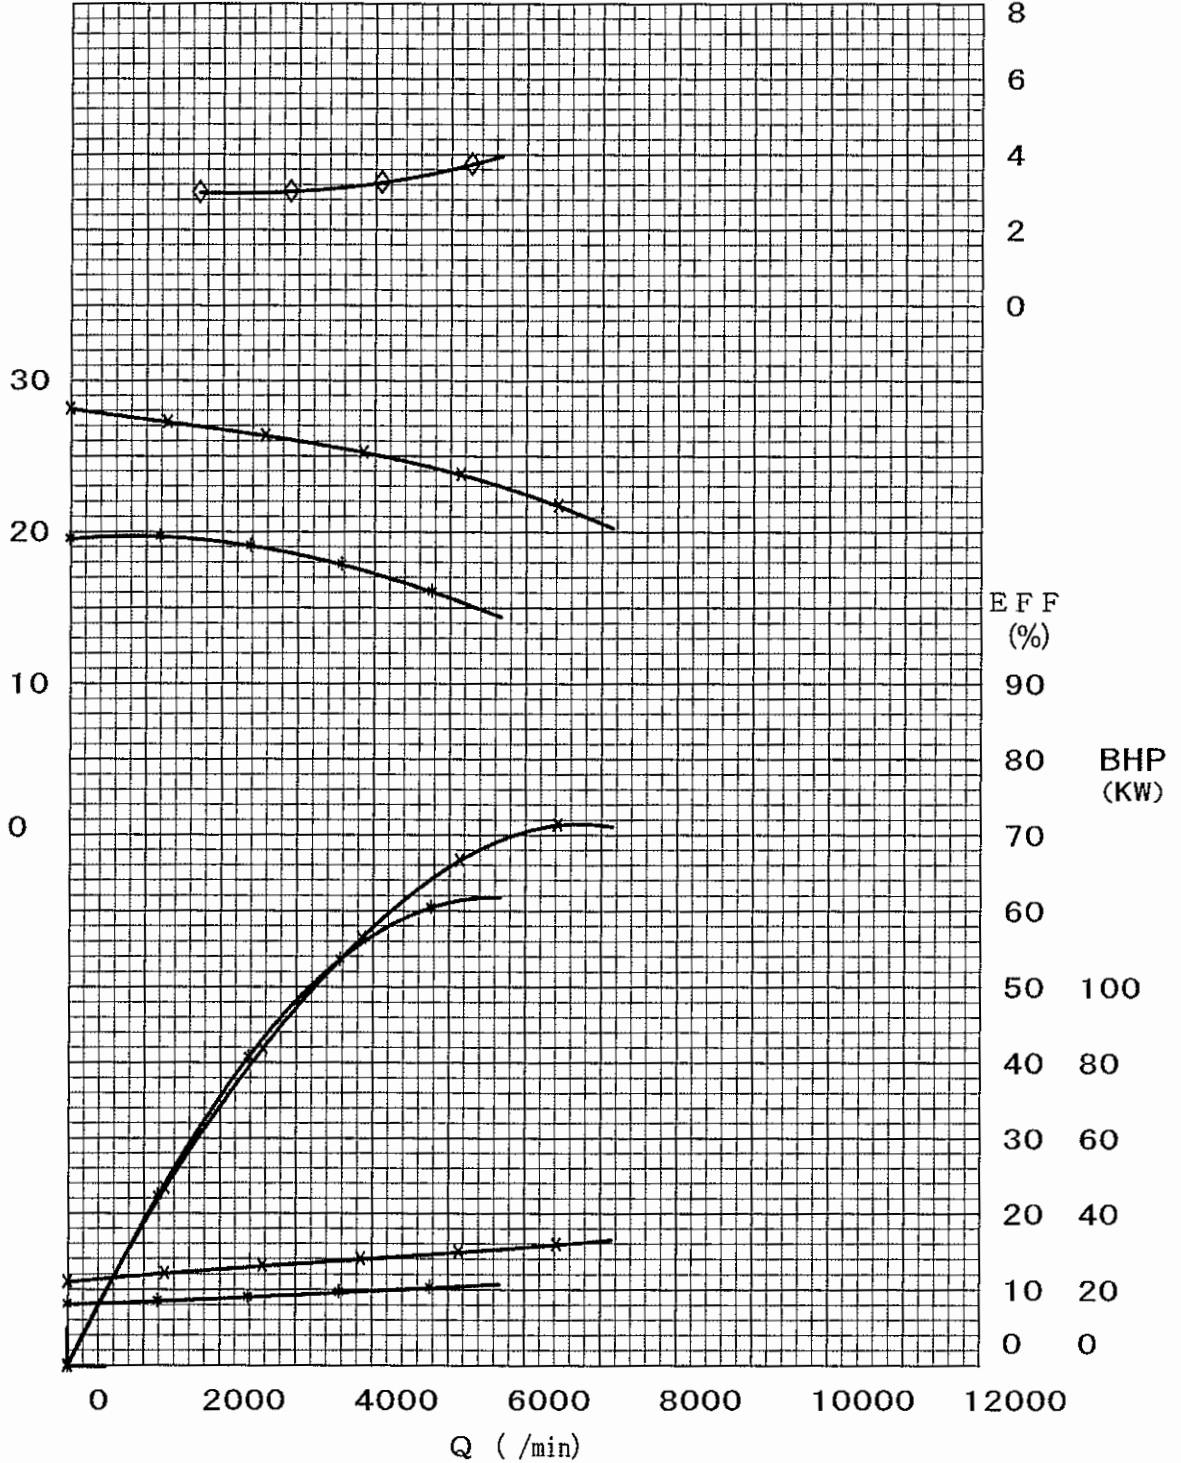

DESIGN CAPACITY

MIN. FLOW CAPACITY

Q d = 6667 /min
(400 m³/h)

WITHOUT INDUCER
1667 /min
(100 m³/h)

WITH INDUCER
- /min
(- m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033