




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN K4 DIA 300 * WITHOUT INDUCER-◇
 47C CONNECTION MOTOR FRAME NO. 350 × WITH INDUCER-△
 SUC. DIS. J1, J2, J3, J4 + NPSHR
 200 X 150 K1, K2, K3, K4 ∇ (m)

S.G. 1.000
 VIS. 1.00

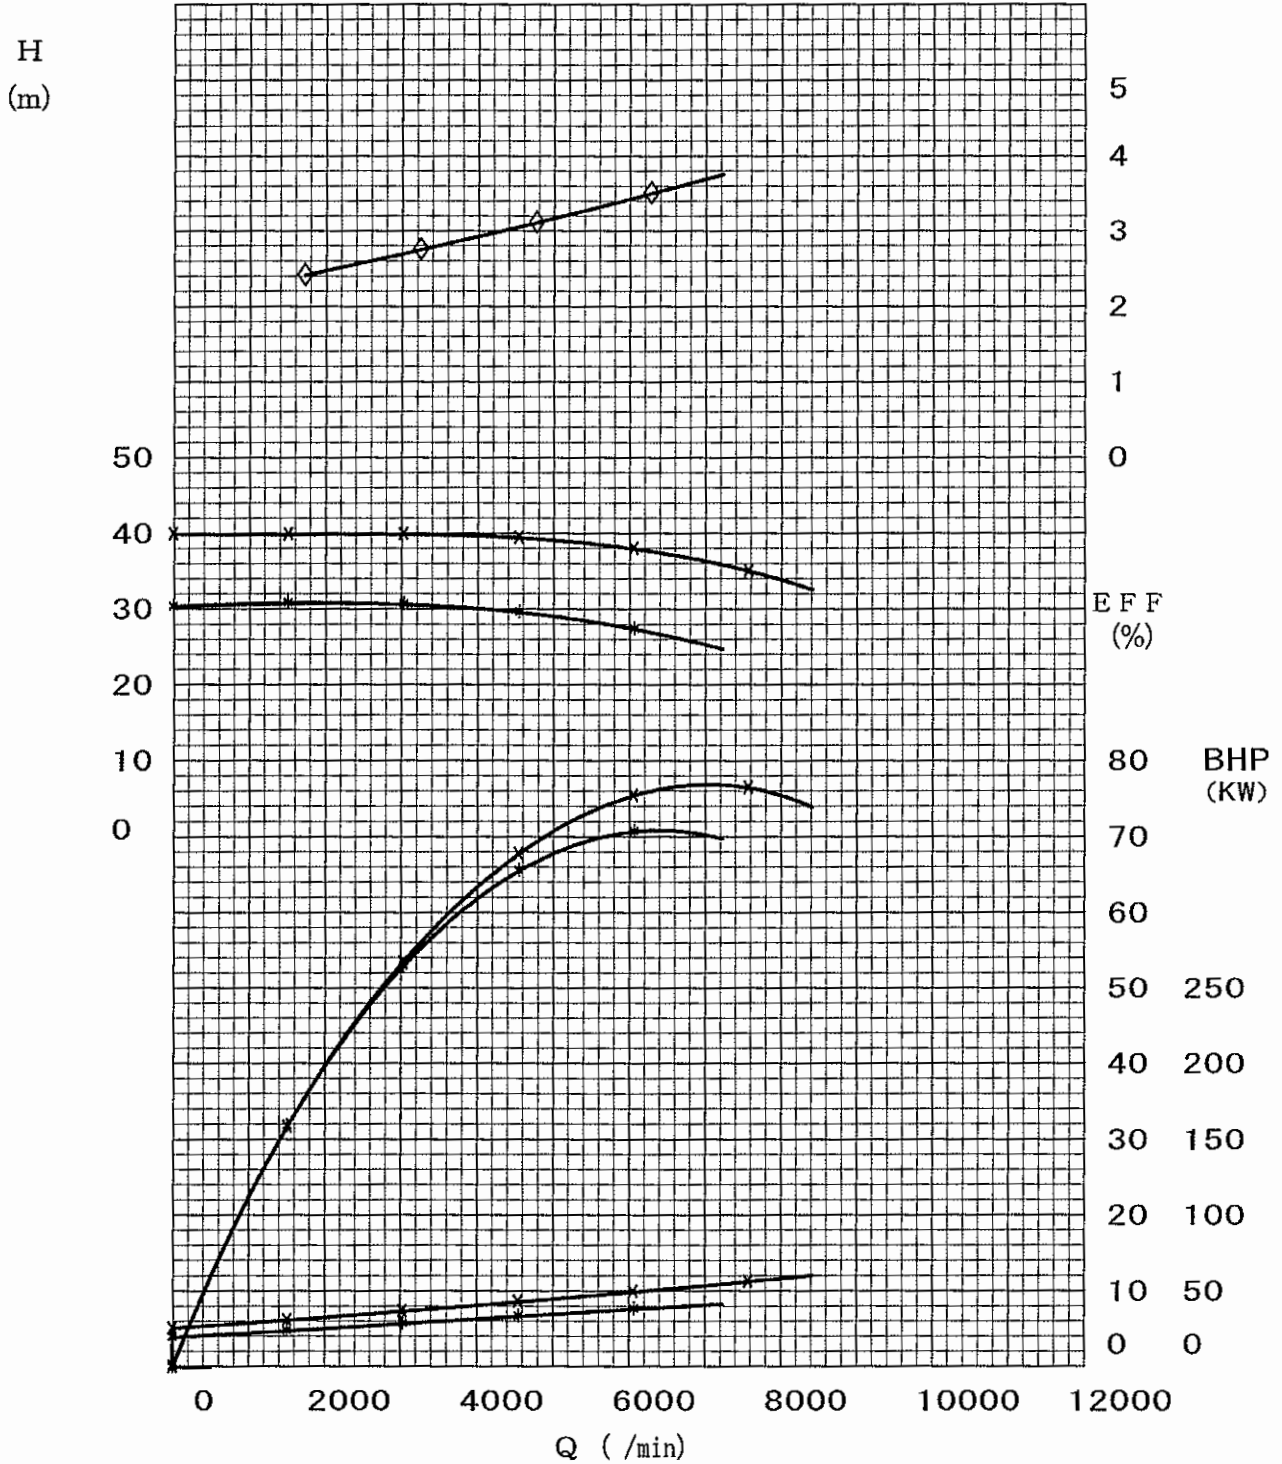

DESIGN CAPACITY

Q d = 6667 /min
 (400 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
1667	/min	-	/min
(100	m ³ /h)	(-	m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

P# 5033