



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
47D

HN

K4

D I A

335 * WITHOUT INDUCER-◇


CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	J1, J2, J3, J4
200	X 150	K1, K2, K3, K4

420 X WITH INDUCER-△

S. G. 1.000
VIS. 1.00

+ NPSHR
▽ (m)

H (m)

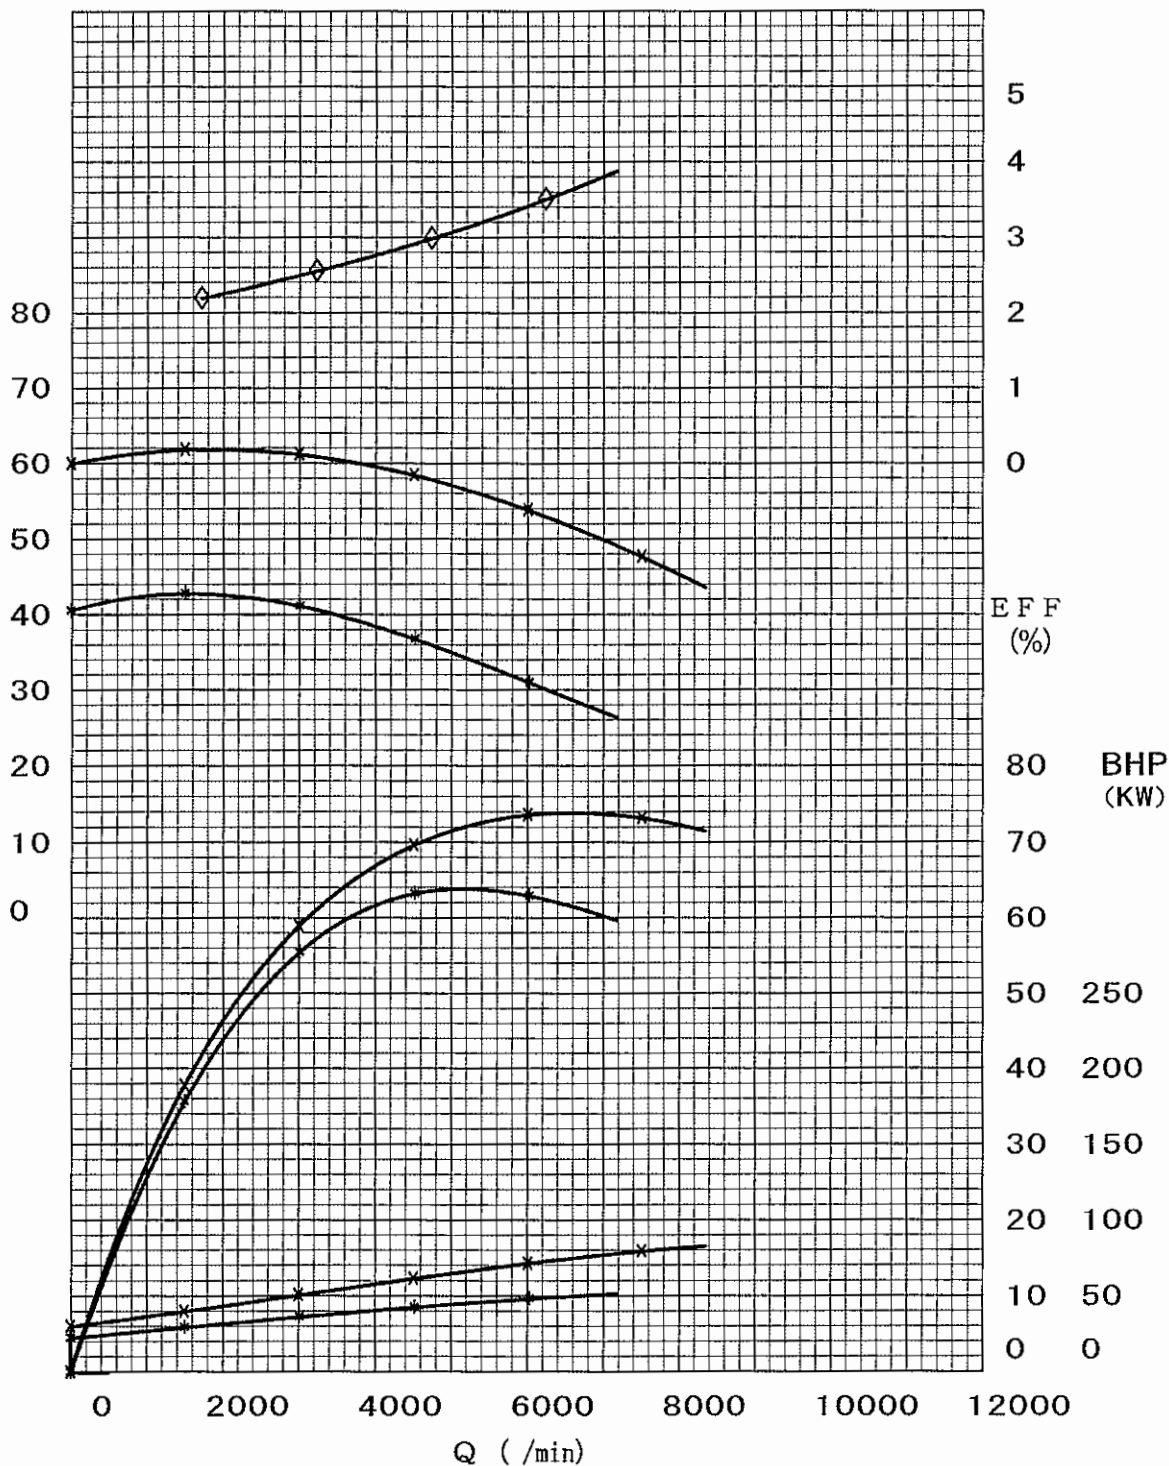

DESIGN CAPACITY

Q d = 6667 /min
(400 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
1667 /min	(100 m³/h)	- /min	(- m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033