




SGM SERIES

CHARACTERISTIC CURVES

| | |
|---------|--|
| No | |
| Issued | |
| Revised | |

50 Hz HN K4 DIA 315 * WITHOUT INDUCER-◇
 48C CONNECTION MOTOR FRAME NO. 393 × WITH INDUCER-△
 SUC. DIS. K1, K2, K3, K4 + NPSHR
 VIS. 1.000 250 X 200 ∇ (m)

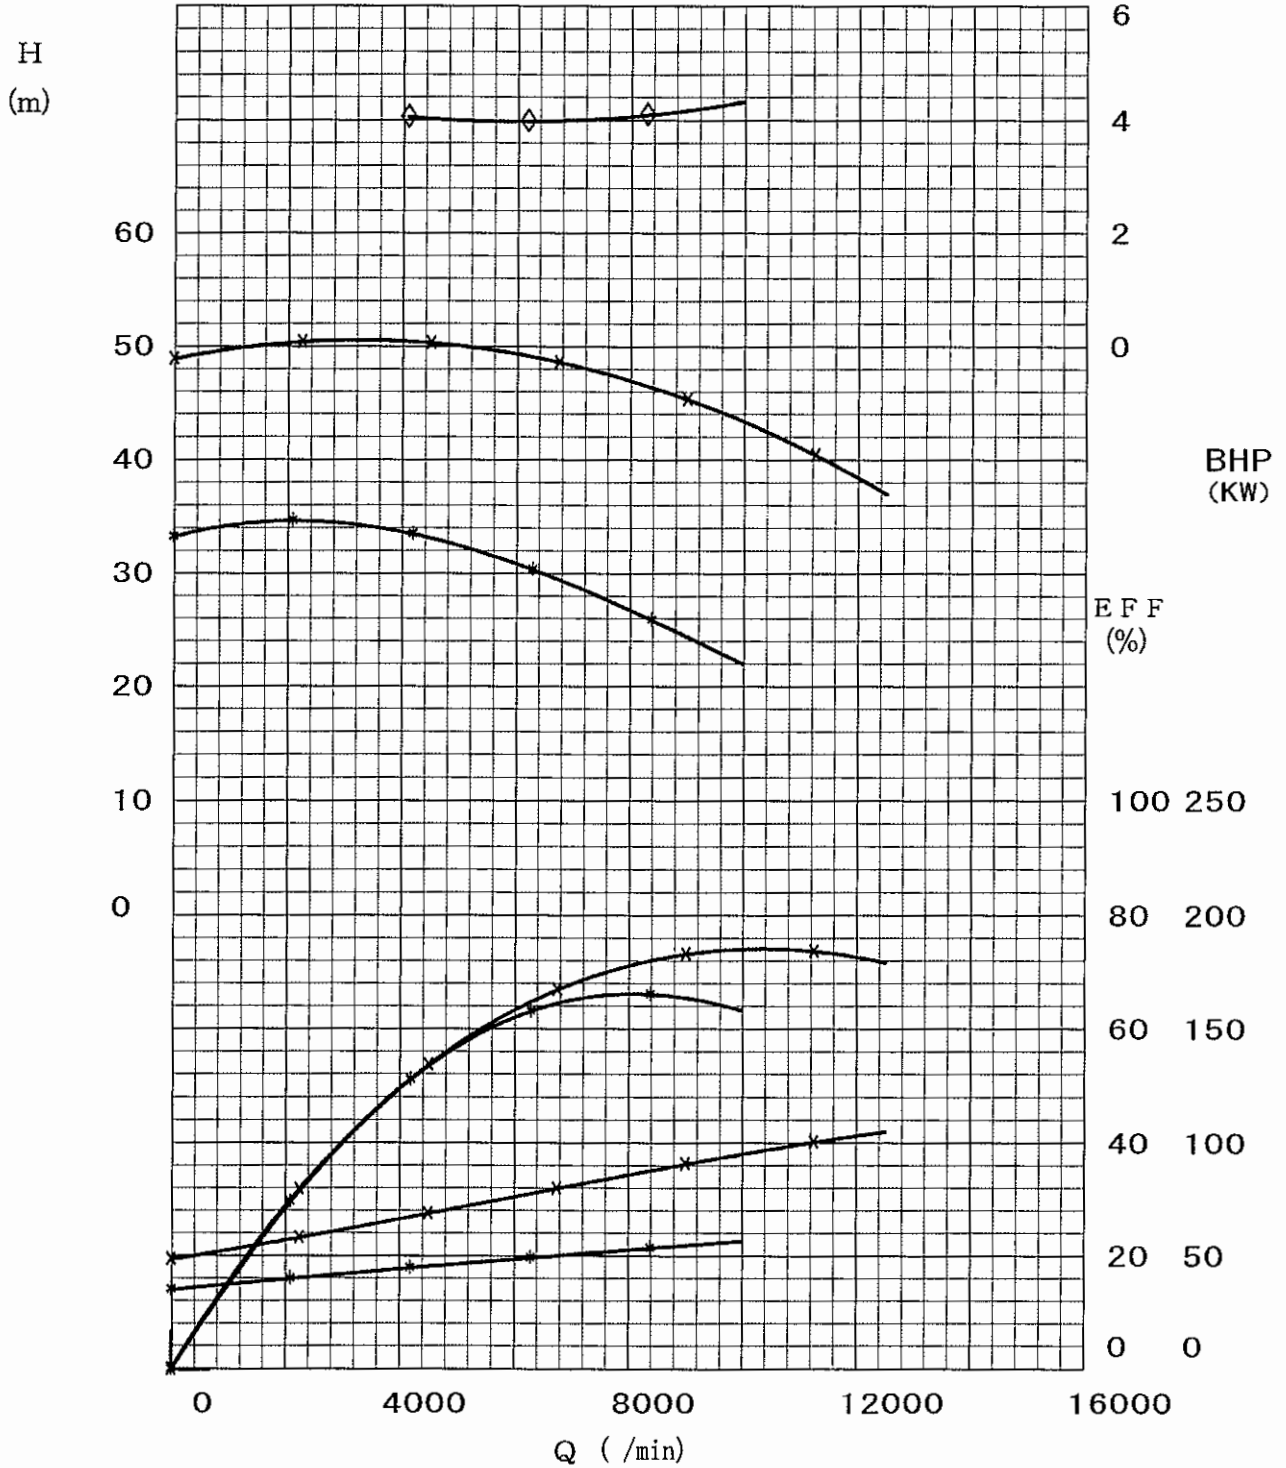

DESIGN CAPACITY

Q d = 10000 /min
 (600 m³/h)

MIN. FLOW CAPACITY

| WITHOUT INDUCER | | WITH INDUCER | |
|--------------------------|------------------------|------------------------|------------------------|
| 4000 /min | - /min | - /min | - /min |
| (240 m ³ /h) | (- m ³ /h) | (- m ³ /h) | (- m ³ /h) |

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032