




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz HN K4 DIA 400 * WITHOUT INDUCER-◇
 48D SUC. DIS. MOTOR FRAME NO. 512 X WITH INDUCER-△
 S.G. 1.000 CONNECTION 250 X 200 + NPSHR
 VIS. 1.00 K1, K2, K3, K4 ∇ (m)

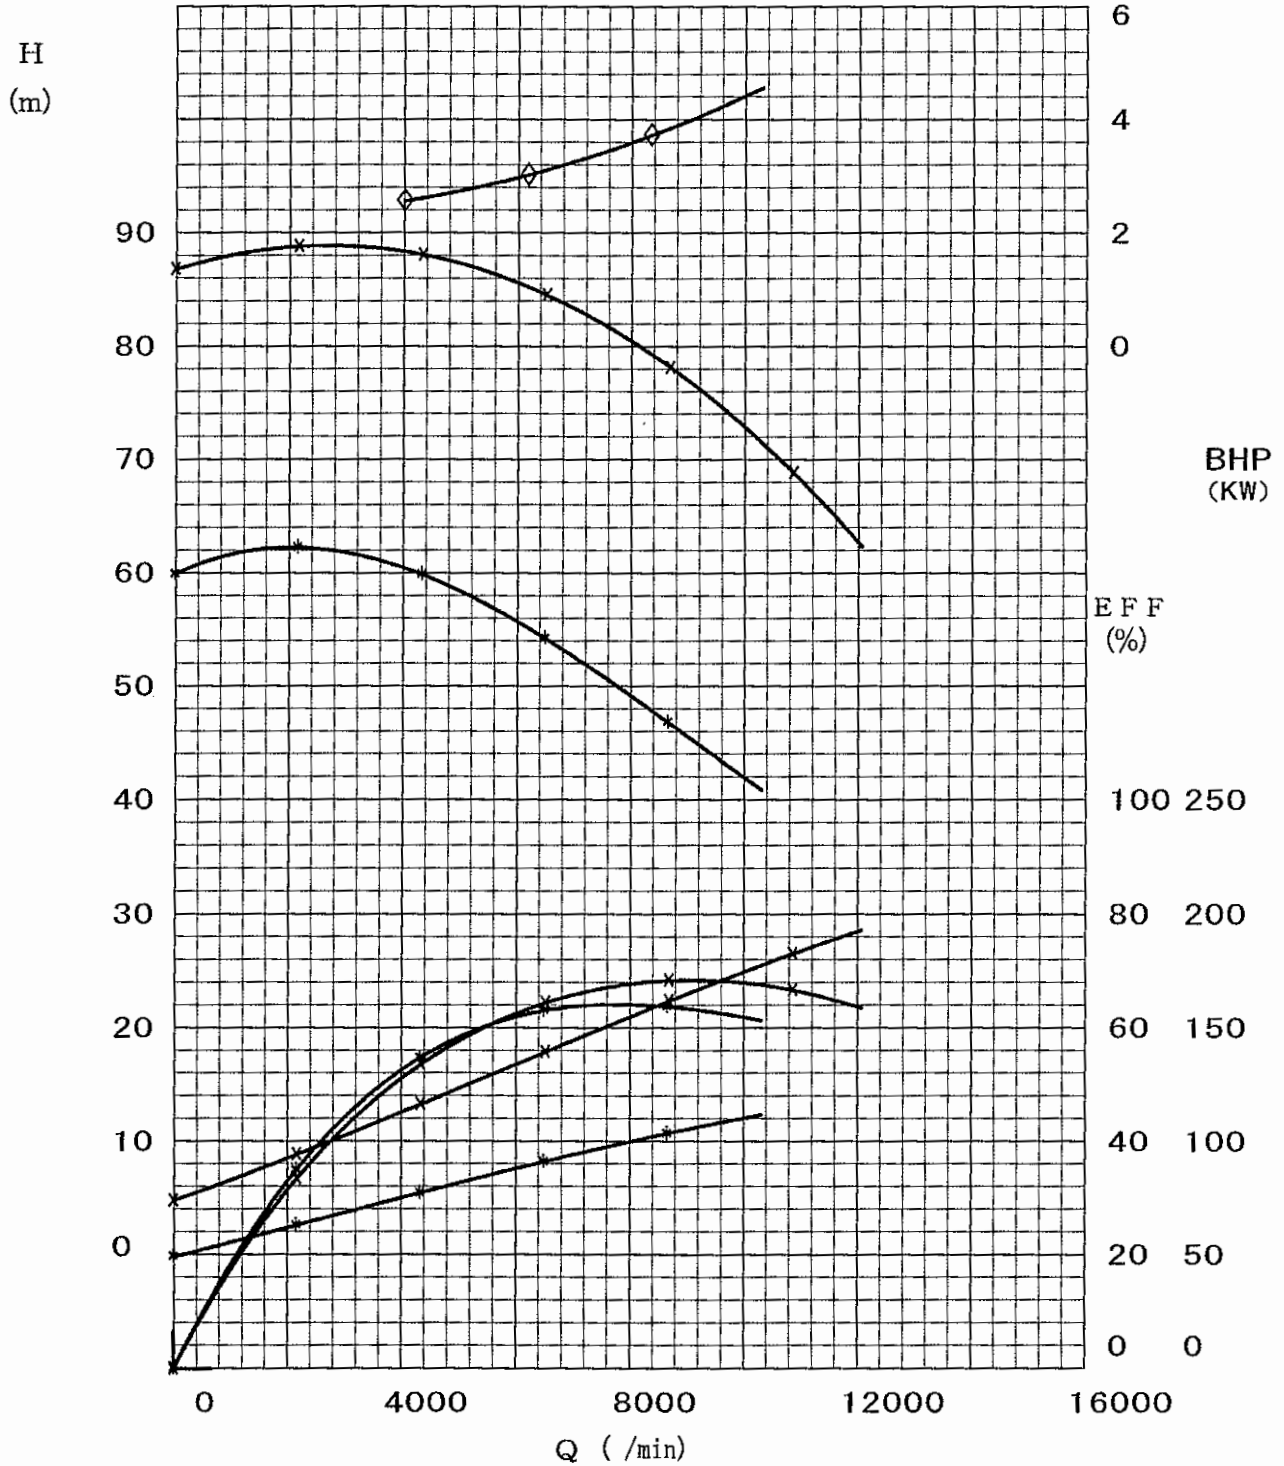

DESIGN CAPACITY

Q d = 10833 /min
 (650 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
4000 /min	- /min	- /min	- /min
(240 m ³ /h)	(- m ³ /h)	(- m ³ /h)	(- m ³ /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S032