




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz TN G3 D I A 225 * WITHOUT INDUCER-◇
 27E CONNECTION MOTOR FRAME NO. 281 × WITH INDUCER-△
 SUC. DIS. G1, G2, G3 + NPSHR
 VIS. 1.00 150 X 125 ∇ (m)

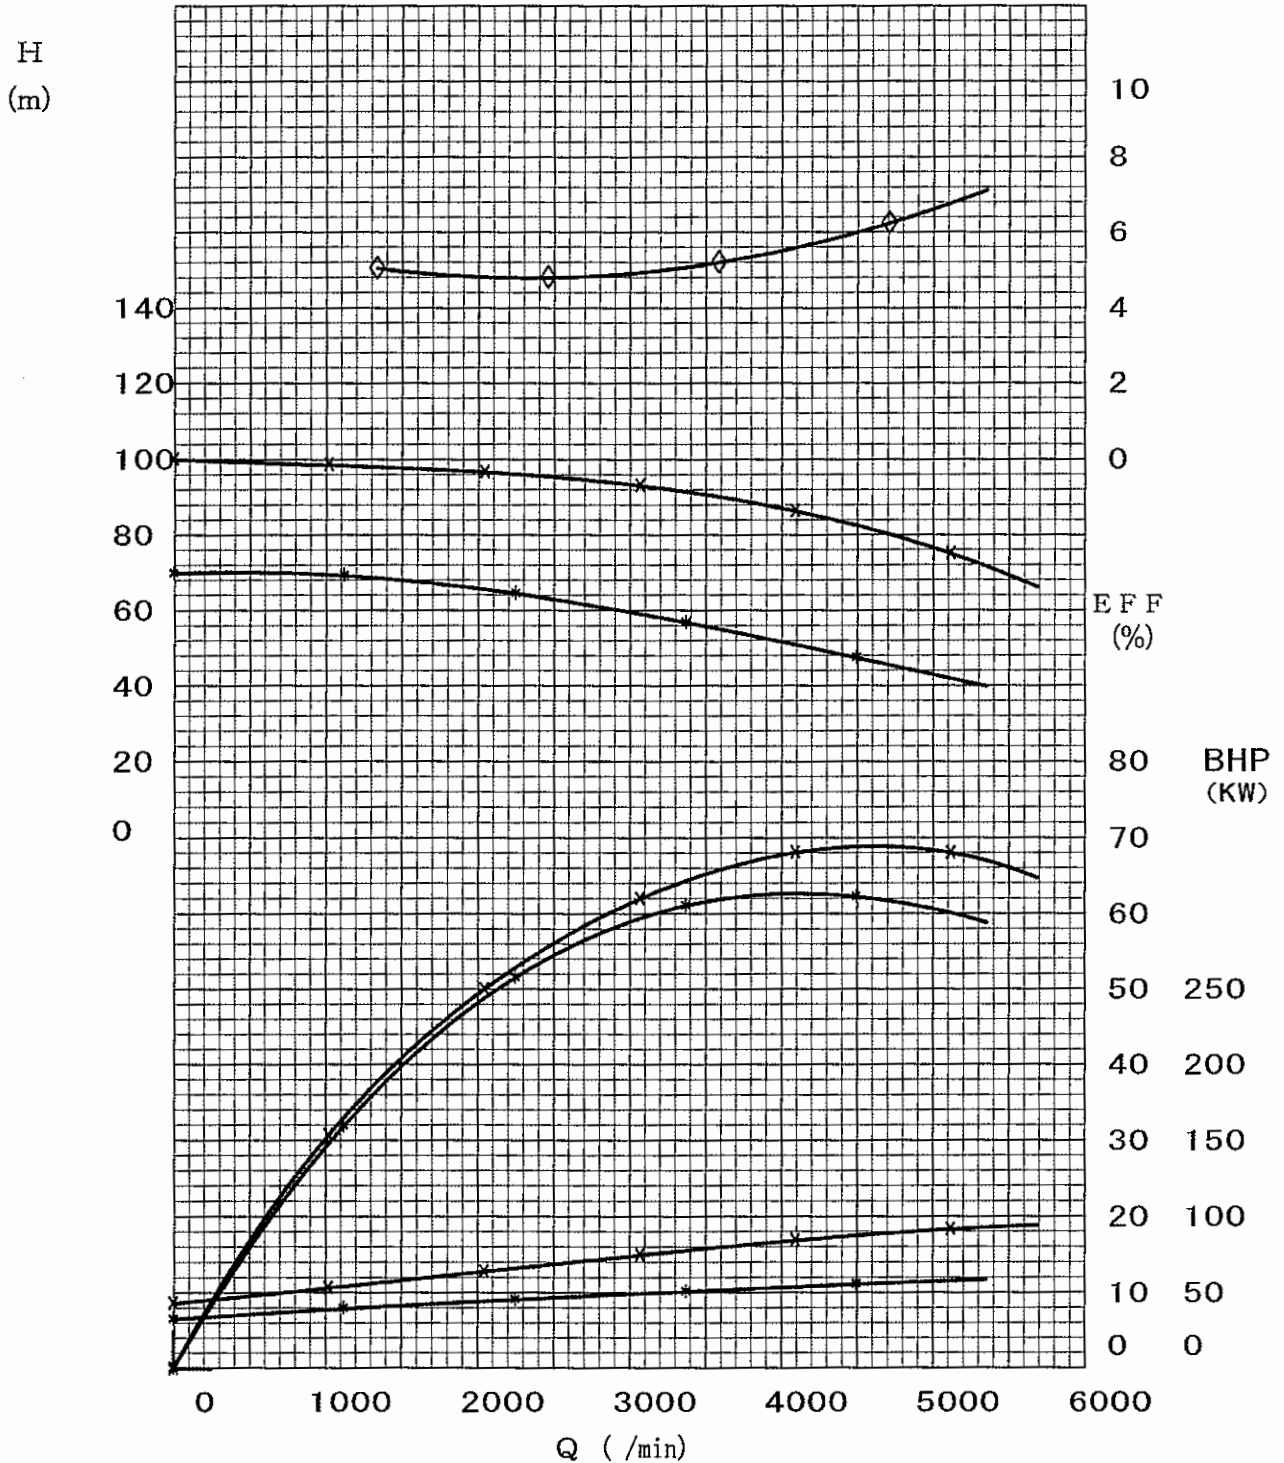

DESIGN CAPACITY

Q d = 5000 /min
 (300 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
1333 /min	- /min	- /min	- /min
(80 m³/h)	(- m³/h)	(- m³/h)	(- m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033