



SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz
26F

TN

G3

DIA


245 * WITHOUT INDUCER-◇

350 × WITH INDUCER-△

S.G. 1.000
VIS. 1.00

CONNECTION		MOTOR FRAME NO.
SUC.	DIS.	G1, G2, G3
125	X 100	

+ NPSHR
▽ (m)

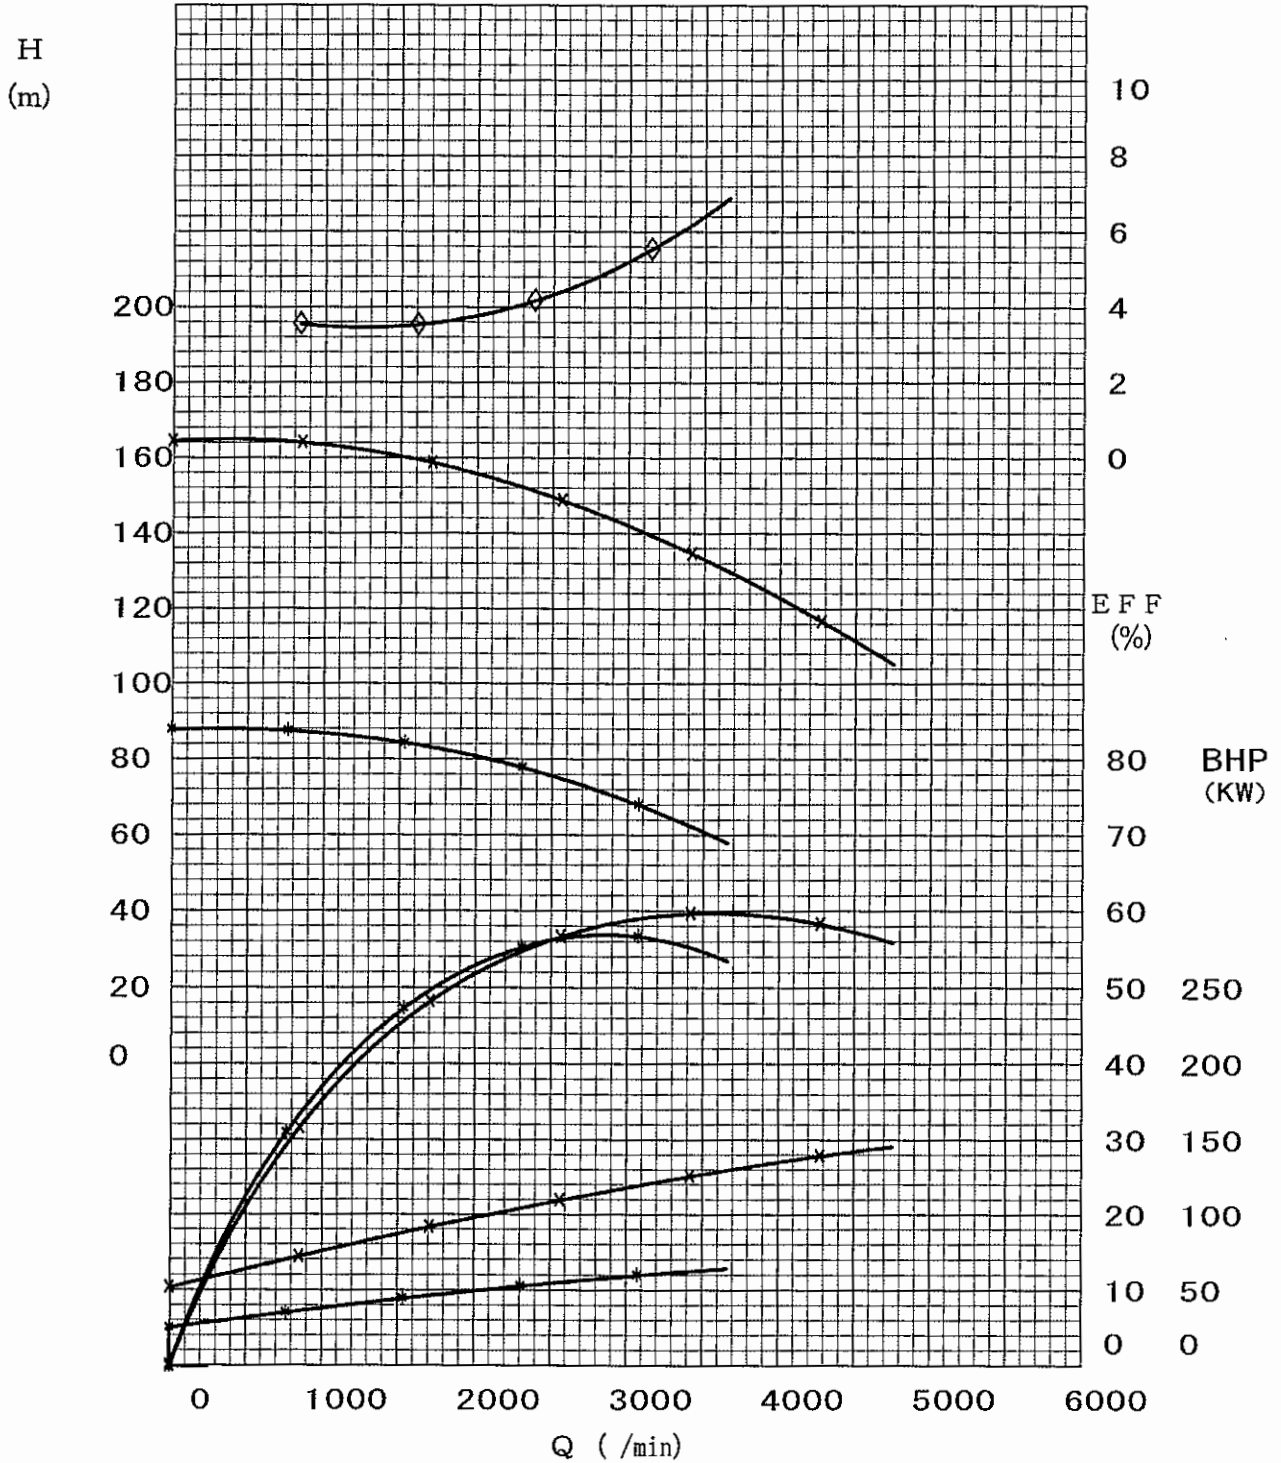

DESIGN CAPACITY

Q d = 3333 /min
(200 m³/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
833 /min	- /min	- /min	- /min
(50 m³/h)	(- m³/h)	(- m³/h)	(- m³/h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033