




SGM SERIES

CHARACTERISTIC CURVES

No	
Issued	
Revised	

50 Hz TN G3 DIA 255 \* WITHOUT INDUCER-◇  
 27F CONNECTION MOTOR FRAME NO. 320 × WITH INDUCER-△  
 S.G. 1.000 SUC. DIS. G1, G2, G3 + NPSHR  
 VIS. 1.00 150 X 125 ∇ (m)

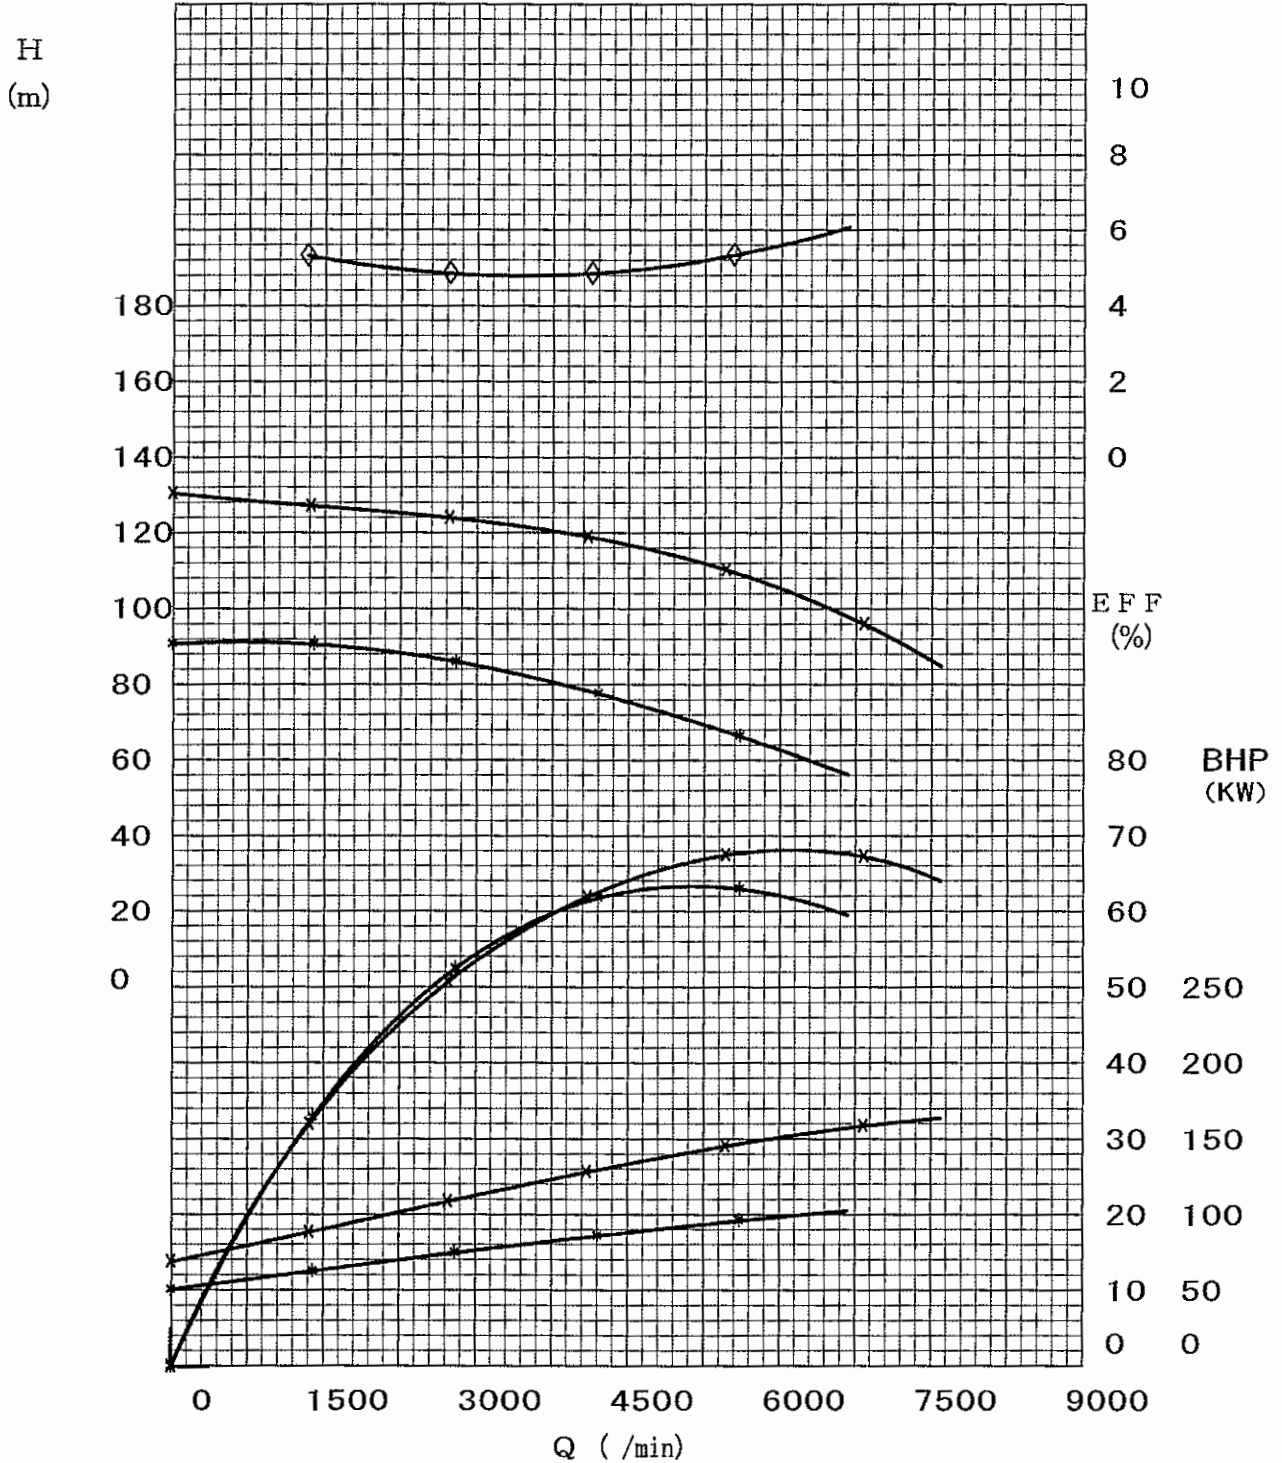

DESIGN CAPACITY

Q d = 6000 /min  
 ( 360 m<sup>3</sup>/h)

MIN. FLOW CAPACITY

WITHOUT INDUCER		WITH INDUCER	
1333 /min	- /min	- /min	- /min
( 80 m <sup>3</sup> /h)	( - m <sup>3</sup> /h)	( - m <sup>3</sup> /h)	( - m <sup>3</sup> /h)

TEST

Z= 1.050 Y= 1.000

客先提出不可

F# S033