


HX - A5-Motor

(Gehäusenendruck / Casing Pressure 20bar)

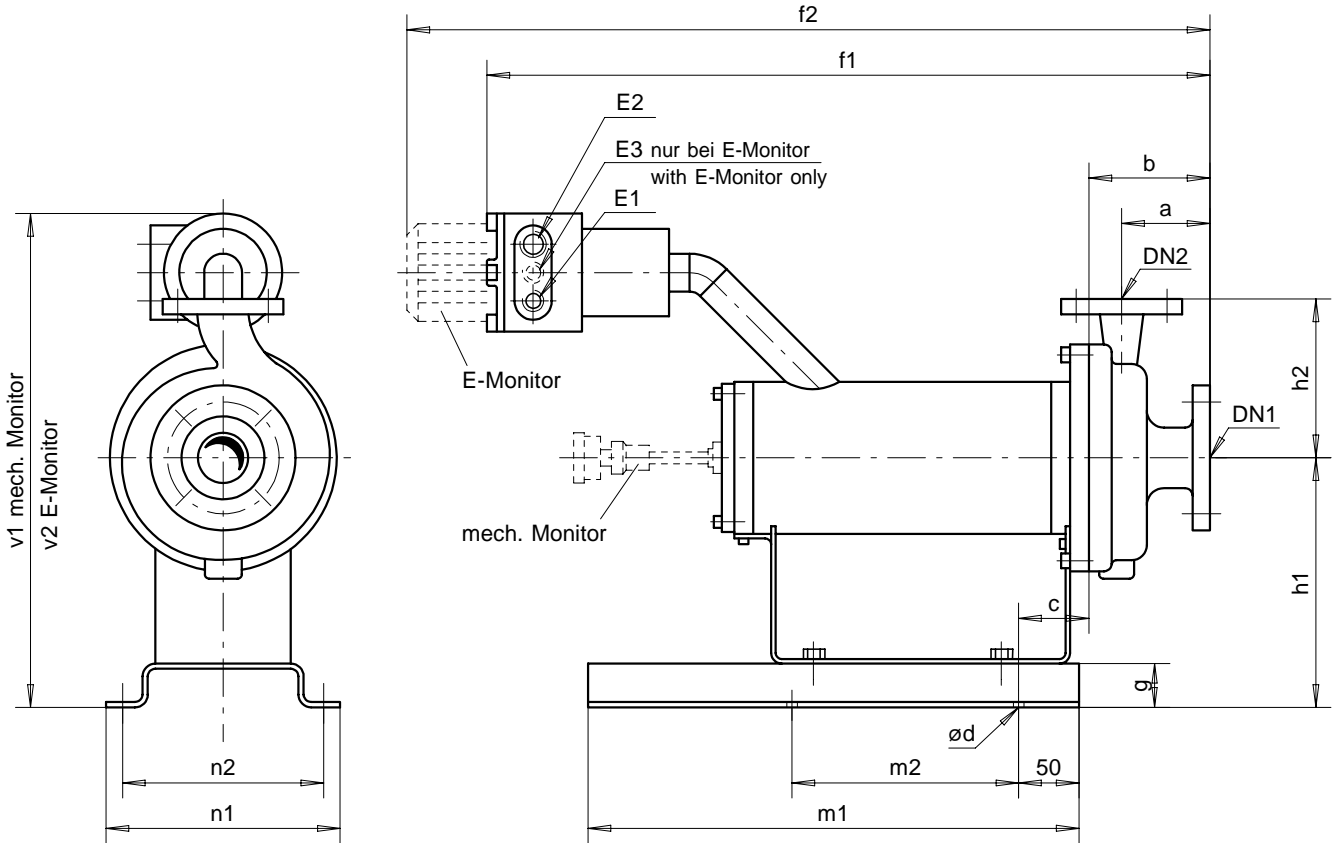

Maße / Dimensions in [mm]
Gewichte / Weights in [kg]

Modell	DIN PN40		ANSI #150		a	b	c	ød	f1	f2	g	h1	h2	m1	m2	n1	n2	v1	v2	E1	E2	E3	Gew. Wt.
	DN1	DN2	DN1	DN2																			
HX21A-A5	50	32	2"	1 ½"	80	106	61	15	796	909	40	240	140	468	218	210	185	523	533	M20	M32	M20	-
HX21B-A5						105	61		795	908			140										-
HX21C-A5						106	61		797	910			160										-
HX22A-A5	50	32	2"	1 ½"	80	115	61	15	805	918	40	240	140	468	218	210	185	523	533	M20	M32	M20	-
HX22B-A5						112	61		803	916			140										-
HX22C-A5						105	63		801	914			160										-
HX22D-A5						112	65		810	923			180										-
HX23A-A5	65	50	2 ½"	2"	80	125	61	15	815	928	40	240	160	468	218	210	185	523	533	M20	M32	M20	-
HX23B-A5						120	65		818	931			160										-
HX23C-A5						114	63		810	923			180										-
HX24A-A5	80	65	3"	2 ½"	100	155	65	15	853	966	40	240	160	468	218	210	185	523	533	M20	M32	M20	-
HX24B-A5						152	65		850	963			180										-