


HX - B5-Motor

(Gehäusenendruck / Casing Pressure 20bar)

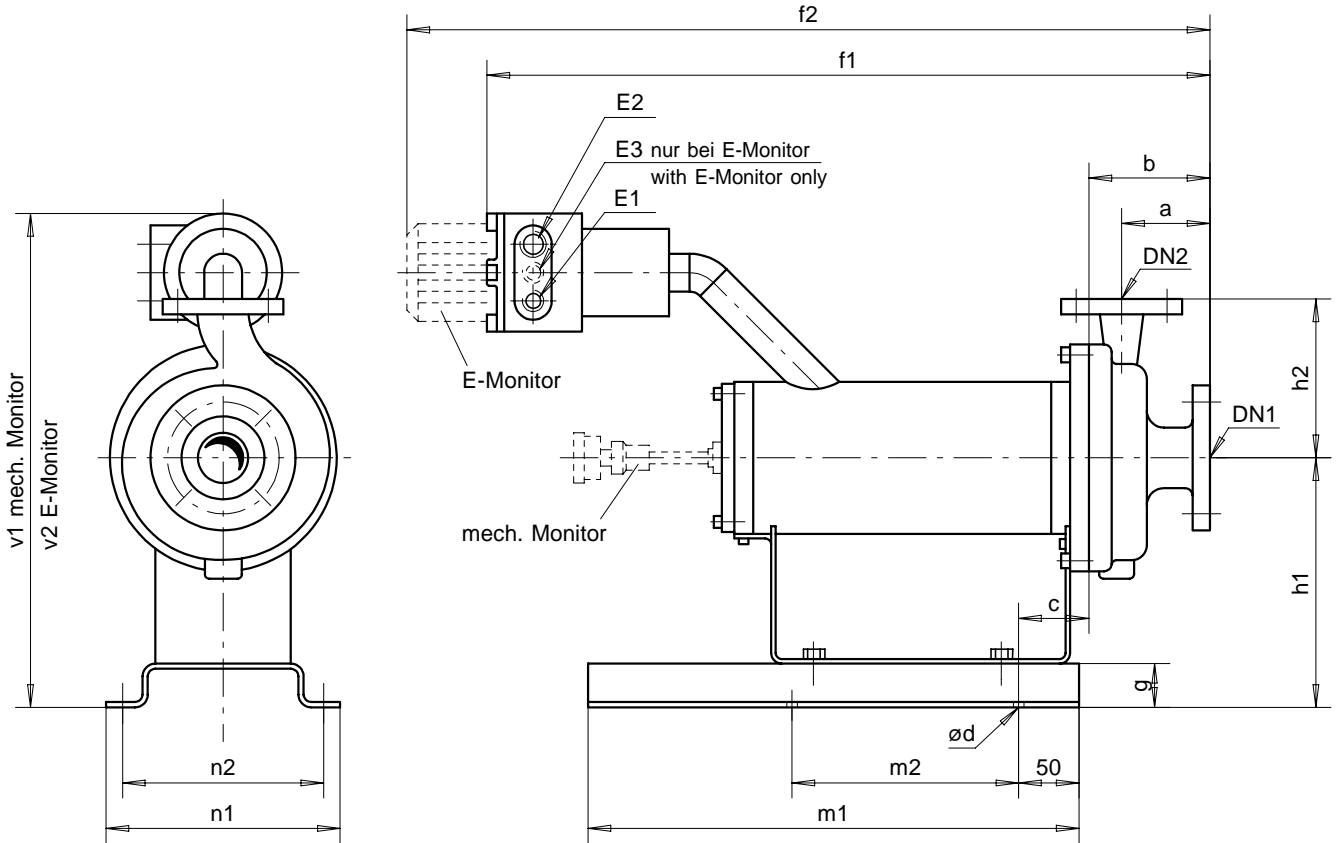

Maße / Dimensions in [mm]
Gewichte / Weights in [kg]

Modell	DIN PN40		ANSI #150		a	b	c	ød	f1	f2	g	h1	h2	m1	m2	n1	n2	v1	v2	E1	E2	E3	Gew. Wt.
	DN1	DN2	DN1	DN2																			
HX22C-B5	50	32	2"	1 1/2"	80	105	66	15	955	1068	50	260	160	640	390	280	255	564	574	M20	M32	M20	-
HX22D-B5					112	68	180		-														
HX22E-B5					100	131	70		225	-													
HX23B-B5	65	50	2 1/2"	2"	80	120	68	15	972	1085	50	260	160	640	390	280	255	564	574	M20	M32	M20	-
HX23C-B5					114	66	180		-														
HX23D-B5	65	40	2 1/2"	1 1/2"	100	136	68	15	988	1101	50	260	180	640	390	280	255	564	574	M20	M32	M20	-
HX23E-B5					134	70	225		-														
HX24A-B5	80	65	3"	2 1/2"	100	155	68	15	1007	1120	50	260	160	640	390	280	255	564	574	M20	M32	M20	-
HX24B-B5						152	68		180	-													
HX24C-B5						152	68		180	-													
HX24D-B5	80	50	3"	2"	100	151	68	15	1003	1116	50	260	200	640	390	280	255	564	574	M20	M32	M20	-
HX25B-B5	100	80	4"	3"	100	174	68	15	1026	1139	50	260	200	640	390	280	255	564	574	M20	M32	M20	-