


HY - M-Motor

(Gehäusenendruck / Casing Pressure 20bar)

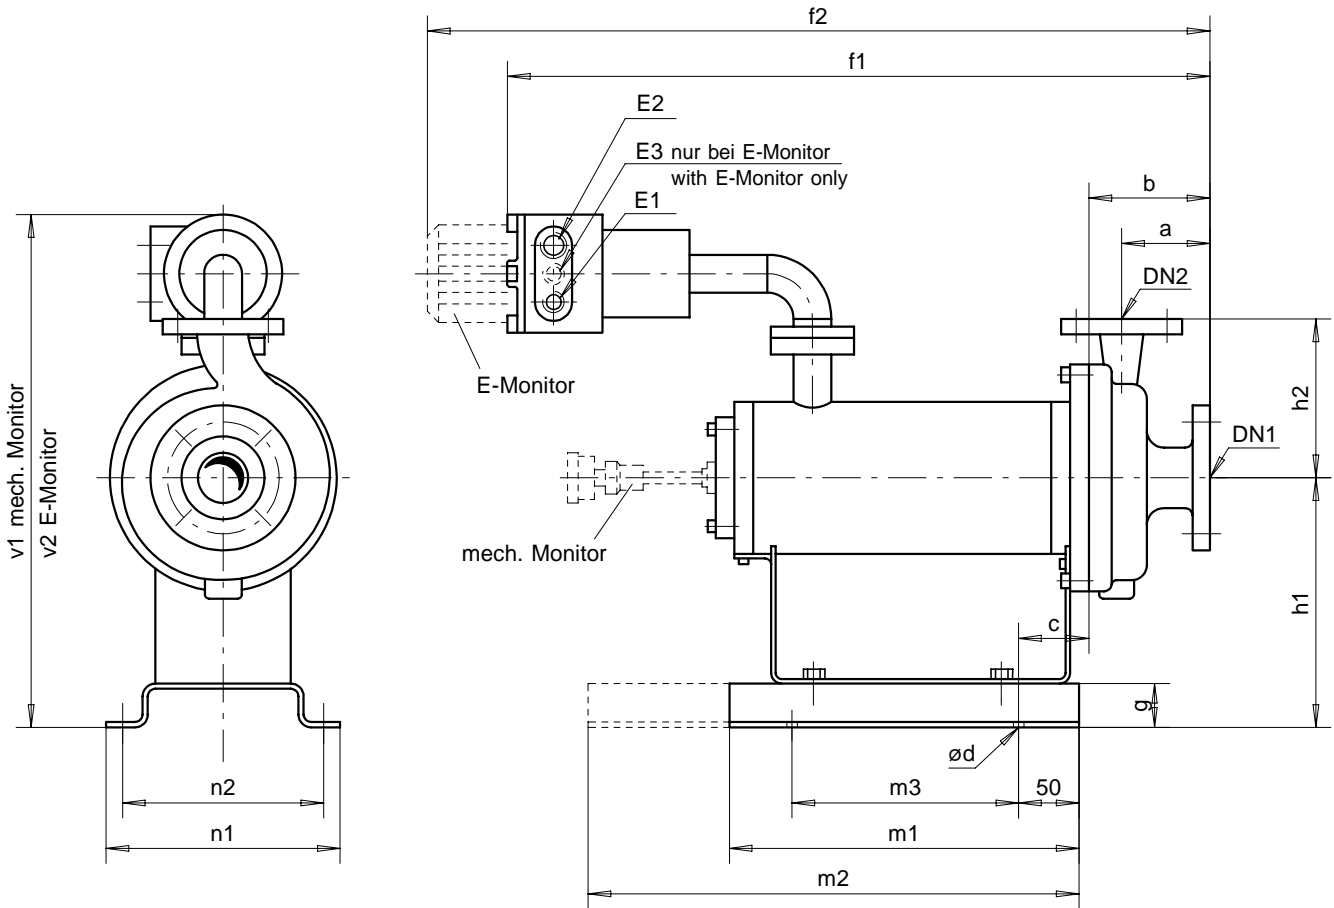

Maße / Dimensions in [mm]
 Gewichte / Weights in [kg]

| Modell | DIN DN1 | PN40 DN2 | ANSI #150 | | a | b | c | ød | f1 | f2 | g | h1 | h2 | m1 | m2 | m3 | n1 | n2 | v1 | v2 | E1 | E2 | E3 | Gew. Wt. |
|---------|---------|----------|-----------|--------|-----|-----|-----|----|------|------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| HY22C-M | 50 | 32 | 2" | 1 1/2" | 80 | 105 | 66 | 15 | 904 | 1017 | 50 | 260 | 160 | 490 | 640 | 390 | 280 | 255 | 610 | 619 | M20 | M32 | M20 | - |
| HY22D-M | | | | | 112 | 68 | 913 | | 1026 | 180 | | | - | | | | | | | | | | | |
| HY22E-M | | | | | 100 | 131 | 70 | | 934 | 1047 | | | 225 | | | | | | | | | | | - |
| HY23B-M | 65 | 50 | 2 1/2" | 2" | 80 | 120 | 68 | 15 | 921 | 1034 | 50 | 260 | 160 | 490 | 640 | 390 | 280 | 255 | 610 | 619 | M20 | M32 | M20 | - |
| HY23C-M | | | | | | | | | 913 | 1026 | | | 180 | | | | | | | | | | | - |
| HY23D-M | 65 | 40 | 2 1/2" | 1 1/2" | 100 | 136 | 68 | 15 | 937 | 1050 | 50 | 260 | 180 | 490 | 640 | 390 | 280 | 255 | 610 | 619 | M20 | M32 | M20 | - |
| HY23E-M | | | | | | | | | 937 | 1050 | | | 225 | | | | | | | | | | | - |
| HY24A-M | 80 | 65 | 3" | 2 1/2" | 100 | 155 | 68 | 15 | 956 | 1069 | 50 | 260 | 160 | 490 | 640 | 390 | 280 | 255 | 610 | 619 | M20 | M32 | M20 | - |
| HY24B-M | | | | | | 152 | 68 | | 953 | 1066 | | | 180 | | | | | | | | | | | - |
| HY24C-M | | | | | | 152 | 68 | | 953 | 1066 | | | 180 | | | | | | | | | | | - |
| HY24D-M | | | | | | 151 | 68 | | 952 | 1065 | | | 200 | | | | | | | | | | | - |
| HY25B-M | 100 | 80 | 4" | 3" | 100 | 174 | 68 | 15 | 975 | 1088 | 50 | 260 | 200 | 490 | 640 | 390 | 280 | 255 | 610 | 619 | M20 | M32 | M20 | - |

Technische Änderungen bleiben vorbehalten / Subject to technical alterations