


- 3 compact model sizes from 4.0 up to 9.6 m<sup>3</sup>/h
- Ultimate pressure 2.0 / 3.0 mbar abs.
- Small dimensions, low weight, easy to integrate
- Gas ballast valve (from O 5.6 and above) for ultimate pressures of 3.0 mbar abs.
- Pump types O 5.4 and O 5.8 specially developed for the demands of table packaging machines
- Pump type O 5.6 as a very robust solution for various demands in the entire industry
- Available in different motor voltages for worldwide operation
- Highly efficient oil separator element for the most effective oil separation
- Ideally suited for the vacuum packaging of food (meat, fish, meat products, cheese ...)
- In addition to the extended accessory range, the development of customized pumps, even for small quantities, belongs to BECKER's core competencies



O 5.4

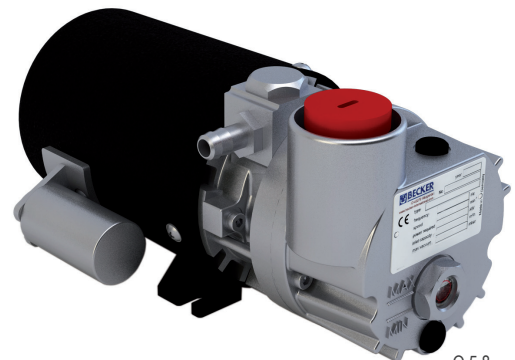

O 5.8



O 5.6

	O 5.4		O 5.6		O 5.8	
	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz
m <sup>3</sup> /h nominal air flow	4.0	4.8	6.4	7.4	8.0	9.6
mbar abs.	2.0	2.0	3.0	3.0	2.0	2.0

