

CSA Certified Diaphragm Pumps

As a global leader in the air-operated double diaphragm industry, Yamada® now offers a series of CSA Certified natural gas driven pumps. The new CSA Certified Series is built on the foundation of the field proven DP & NDP Series pumps, which have had the same, consistent design for several years. With a history of service that has been exemplary throughout the years, these pumps have certainly proven that they're as rugged as the great northern terrain demands.


With sizes in 3/8", 3/4" & 1", the CSA Certified pumps offer you reliability, efficient operation and most of all, safety.

AS RUGGED AS THE NORTHERN TERRAIN



Features

- Natural Gas Powered
- Non-Stalling Air Valve
- Long Diaphragm Life
- All Metal Construction
- Outside Accessible Air Valve
- Lube Free Operation
- Maintenance Friendly
- Outstanding Performance
- All Bolted Design (no band clamps)
- Commonality of parts (NDP-20/25)

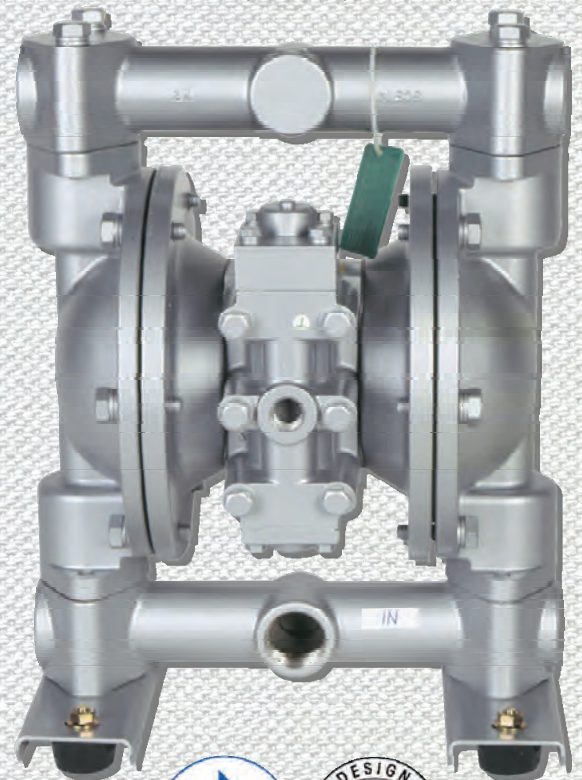

CSA Certified Diaphragm Pumps

Specifications

DP-10BAN-CSA

3/8" NPT Port Dimensions

Supply Pressure – 20-100 PSI (0.1-0.7MPa)

Volume Per Cycle – 0.013 gallons (50mL)

Max Size Solid – 1/32" (1.0mm)

Max Dry Suction Lift – 3.3feet (1M)

NDP-20BAN-CSA

3/4" NPT Port Dimensions

Supply Pressure – 20-100 PSI (0.1-0.7MPa)

Volume Per Cycle – 0.09 gallons (350mL)

Max Size Solid – 1/16" (2.0mm)

Max Dry Suction Lift – 10 feet (3M)

NDP-25BAN-CSA


1" NPT Port Dimensions

Supply Pressure – 20-100 PSI (0.1-0.7MPa)

Volume Per Cycle – 0.16 gallons (600mL)

Max Size Solid – 3/32" (3.0mm)

Max Dry Suction Lift – 16 feet (5M)

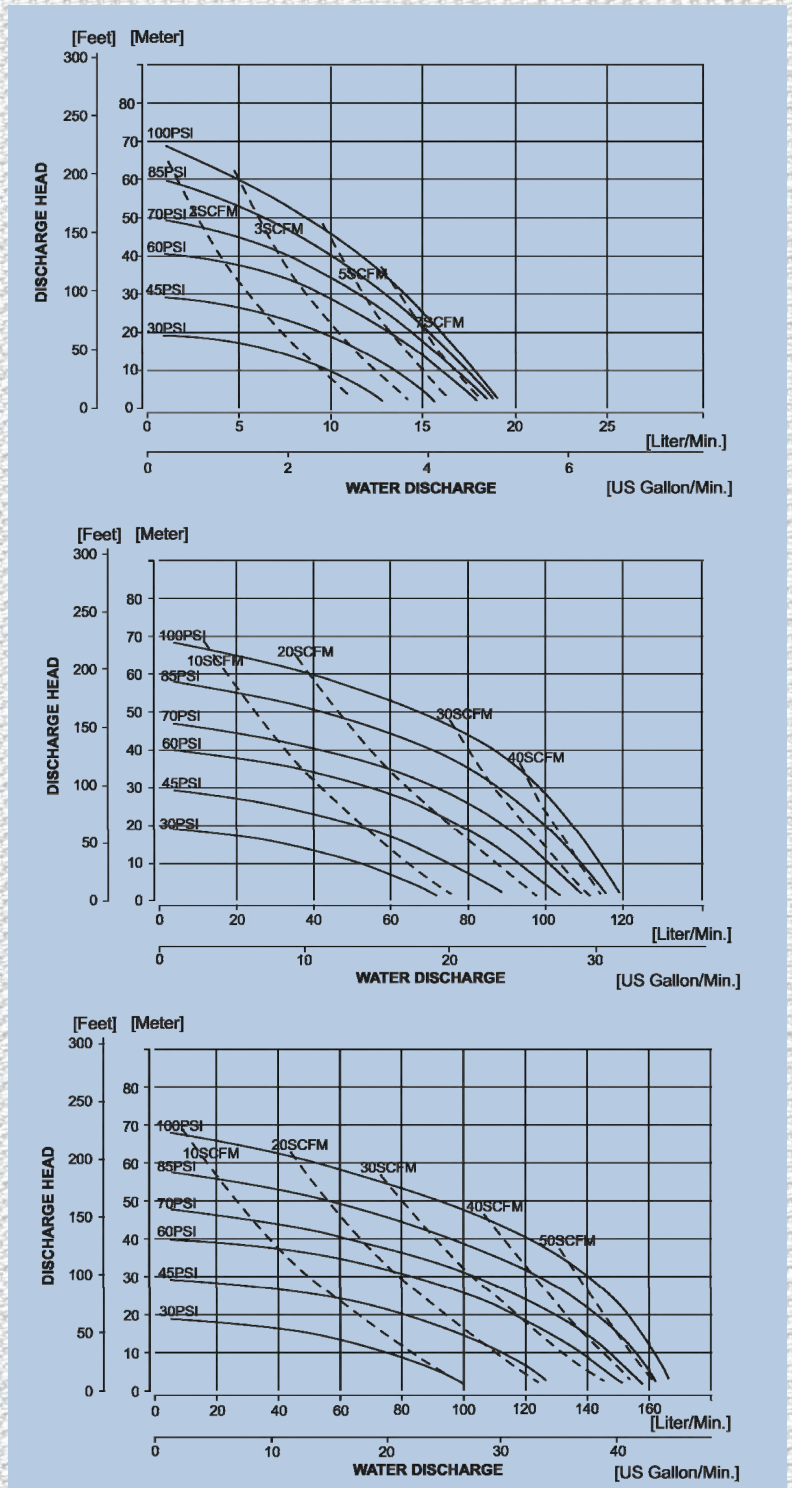

Your Local Distributor:

YAMADA CORPORATION
International Department
 No.1-3, 1-Chome, Minami-Magome,
 Ohta-ku, Tokyo 143-8504, Japan

Phone +81-(0)3-3777-0241
 Fax +81-(0)3-3777-0584

E-mail: intl@yamadacorp.co.jp
 Web: www.yamadacorp.co.jp/global